Specification


	Outdoor								
Pixel Pitch	4mm	5.33mm	6.67mm	P8mm	P10mm				
LED	SMD1921	SMD1921	SMD2727	SMD3535	SMD3535				
Module resolution (dot)	80*80	60*60	48*48	40*40	32*32				
Density	62500	35156	22477	15625	10000				
Brightness	>5000 nits	>5000 nits	>5500 nits	>5500 nits	>5500 nits				
Avg power consumption	380W	360W	280W	240W	280W				
Max power consumption	950W	900W	650W	600W	650W				
Best Viewing Distance	4-40m	5-55m	6-66m	8-80m	10-100m				
Scan Method	1/16S	1/7S	1/6S	1/5S	1/2S				
Module size			320*320mm						
LED Cabinet Size		960*960mm	(Customized Siz	ze Avaliable)					
Material		Magnesi	um Alloy/Steel/A	Muminum					
Fresh Frequency		1920-3840HZ							
Protective grade	Waterproof IP65 Front and Back								
Maintain Way	5)	Frontal & Rear Service-Dual Mode							
Certificates		CE,RoHs,FCC							
Warranty		3 Years Warranty							



SHENZHEN LINSN LED CO.,LTD.

Tel:+86-755-32925789 Mobile/ Skype/Whatsapp /Wechat:+13787050055 Website: www.linsnled.com LED Online Shop: www.ledinthebox.com

Address: Building 11, Sanlian Industrial Park, Shiyan Town, Bao'an District, Shenzhen, China.

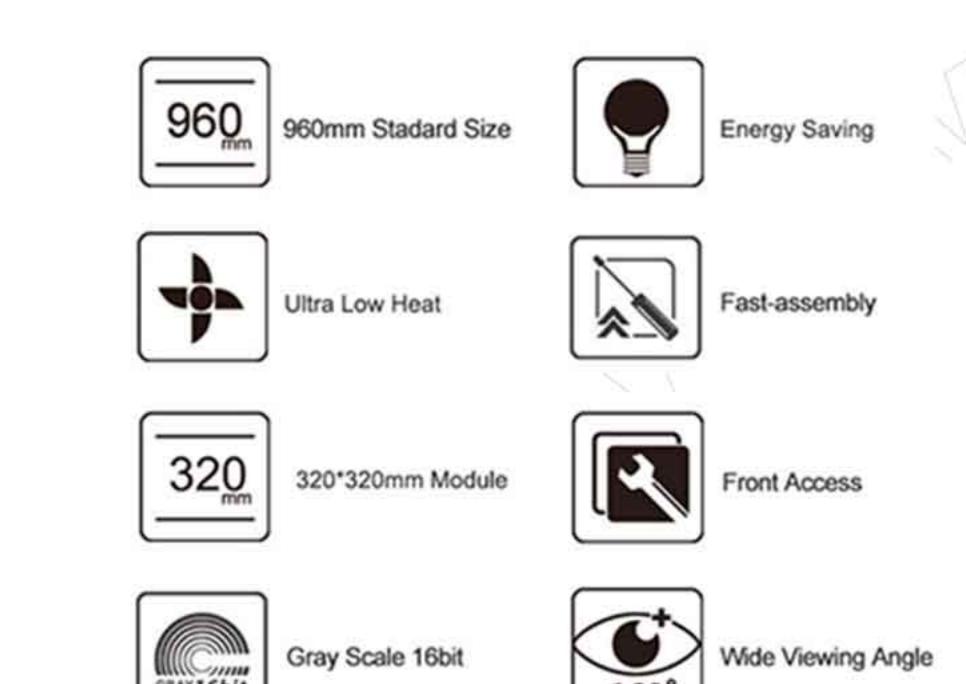



Website: www.linsnled.com Tel:+86-755-32925789



LINSN-MA-960X960-ES

MA-960X960-ES-Outdoor

Energy saving LED display

960X960mm Standard Perfect Structure Energy saving LED display is made by hard magnesium alloy led cabinet, fashion design and top class product structure for better heat dissipation and low heat. The heat of the display is uniform, the color temperature is constant, and no color block in the display at all, and the picture display effect is excellent. energy consumption is maximized without reducing LED display brightness and contrast.


LINSN LED latest outdoor energy saving LED screen


Energy Saving >50% Desgin:

Energy saving is power supplied separately with R and GB, which means that the voltage and current are accurately distributed to the red, green and blue lamp beads. The current passes through the lamp beads and then to the negative electrode of the IC.


The separate power supply scheme effectively reduces the power consumption and greatly reduces the heat generated during the operation of the display screen.

- 1. Using R / GB to separate power supply, current is accurately distributed to the lamp beads, reducing power consumption.
- 2. Reduce the temperature, no need for air conditioning, save cost.
- 3. Reduce power consumption, save electricity and energy, reduce costs greatly.
- 4. Uniform heat distribution, constant color temperature, no color deviation, no color block, good consistency.
- 5. The screen cabinet has low heat, which is about 16 °C lower than the common LED display product.

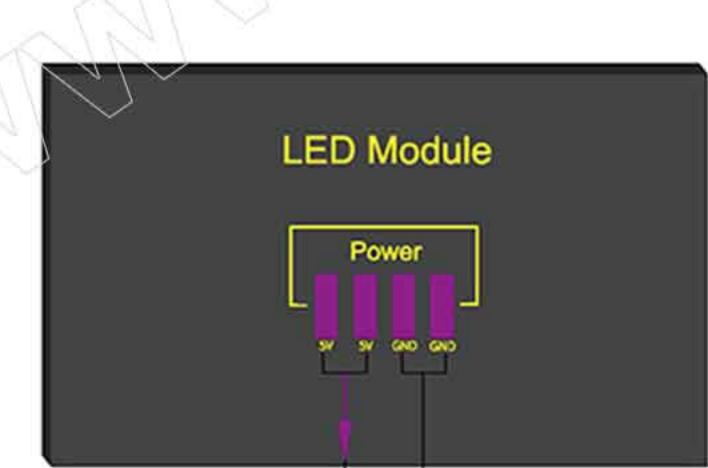




Common LED display

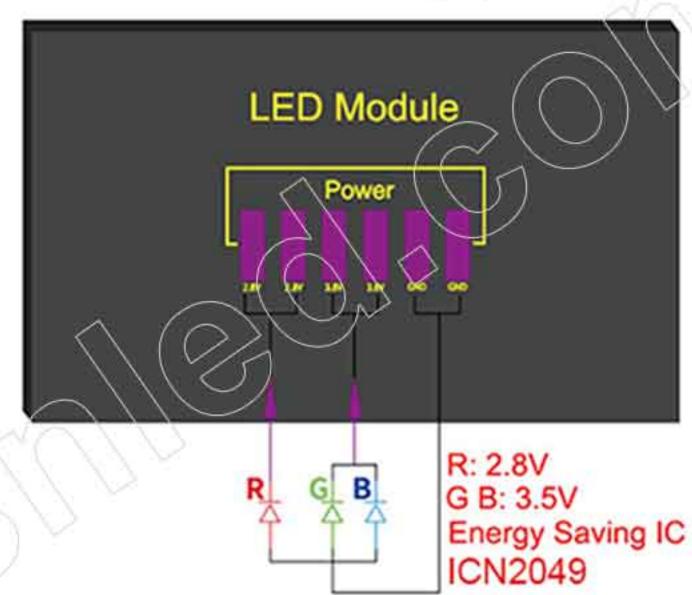

Linsn Energy Saving LED display

Standard Size LED Module-Dual Mode Service

960*960mm standard cabinet design with 320*320mm LED module panel.led display, module size is 320x320mm dimension with frontal & Rear Service, ultra low heat and has excellent performance in improving energy efficiency and environment protection.

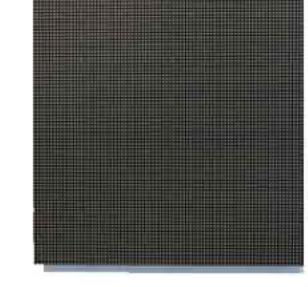






















P5.3

P6.67










Widely Outdoor Application

With Energy Saving and Dual Service Maintenance, LINSN 960X960mm Series LED Display are possibly to installed for more application, where there is no enough space to install, or where there is no enough power, you can choose LINSN LED Energy Saving LED Display Screen.






Door Key











DELICATE CABINET DESIGN

Energy saving Series LED display Product is Less weight led display with quick locks, delicate structure for easy installation without Gaps. Humanization handlebar design make you more easy to move the cabinet.

ULTRA THIN



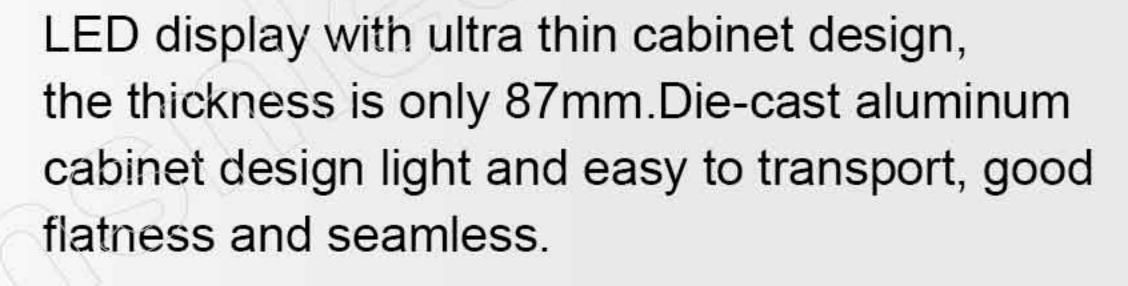











Weight Only 26kg, easy for transport, save your labor cost, also light weight is convenient for installtion, assembly and disassembly.

Specification

	Indoor				Outdoor					
Pixel Pitch	2.5mm	3.07mm	4mm	5mm	10mm	4mm	5mm	6.67mm	8mm	10mm
Density (dots/m²)	160000	105688	62500	40000	10000	62500	40000	22478	15625	10000
Module Size		3	320x160mr	n			3	20x160mr	n	
Module Resolution (dots	128x64	104x52	80x40	64x32	32x16	80x40	64x32	48x24	40x20	32x16
Cabinet Size		96	0x960x87r	nm			96	0x960x87n	nm	
Cabinet Weight		24kg/pc				26kg/pc				
Material		Die-casting Magnesium Alloy			Die-casting Magnesium Alloy					
Brightness		80	0-1000cd/	m²		5500-6500cd/m²				
AVG Power Con	450w	380w	350w	320w	280w	480w	450w	350w	320w	280w
MAX Power Con	980w	900w	880w	850w	750w	980w	950w	880w	850w	750w
Best Viewing Distance	2.5to 25m	3to 30m	4to 40m	5to 50m	10to100m	4to 40m	5to 50m	6to 60m	8to 80m	10to100m
Grey Level		WALL	14bits					14bits		
Fresh frequency	1		≥960HZ					≥960HZ	100	1
Humidity-operating		2	10-95% RH	-1		10-95% RH				
Operating Life		100000 hours				100000 hours				
Certificates	CE,RoHs,FCC,UL			CE,RoHs,FCC,UL						
Warranty		3 Years				3 Years				
Protective grade			IP43				IP6	55 Waterpr	oof	



SHENZHEN LINSN LED CO.,LTD.

Tel:+86-755-32925789 Mobile/ Skype/Whatsapp /Wechat:+13787050055 Website: www.linsnled.com LED Online Shop: www.ledinthebox.com

Address: Building 11, Sanlian Industrial Park, Shiyan Town, Bao'an District, Shenzhen, China.



Website: www.linsnled.com Tel:+86-755-32925789





LINSN-MA-960x960

MA-960X960-Indoor/Outdoor

Indoor & Outdoor LED display

Linsn-MA-960 Series Standard Size 960X960mm LED display is Linsn latest LED display with Ip65 good waterproof level. we use best Driving IC such as 2038S, MBI5124, Nationstar LED to ensure our LED display best brightness.can be used as indoor fixed led display, outdoor fixed led display and rental LED display.



Focus on details

ACCURATE CABINET ALIGNMENT, HIGH PRECISE ASSEMBLY

Equipped with Unit's unique lock, the position of each cabinet can be precisely adjusted from Six directions, left or right, up or down, front or back, so every cabinet can be positioned to the exact place with accuracy to millimeter, presenting a ultraflat and seamless cabinet alignment.

320MMX160MM STANDARD SIZE MODULE

Standard size panel: 320*160mm. Pay more attention to the standard led screen display performance, the Quick Assembling and Maintenance. also it is very convenient when you change the pixel pitch such as P5mm to P10mm. you dont need to change anything, just change the module as they have the same module size and structure.








WIDE VIEWING ANGLE

Viewing angle is up to 160° vertical and horizontal, providing a wide viewing angle.



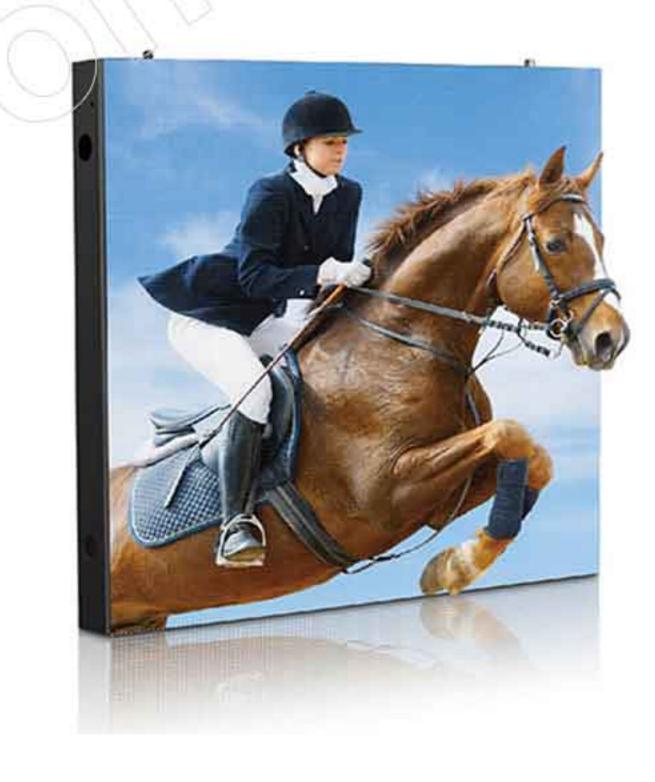

HIGH RELIABILITY

The ingress protection of cabinet rating up to 68, the fully sealed cabinet is weatherproof, dustproof, damp-proof, bringing the ingress protection of led display up to a new level.





Door Key









Cabinet Frame

Product is Less weight led display with quick locks, delicate structure for easy

installation without Gaps. Humanization handlebar design make you more easy to move the cabinet.

ULTRA THIN

LED display with ultra thin cabinet design, the thickness is only 87mm.Die-cast aluminum cabinet design light and easy to transport, good



flatness and seamless.



Weight Only 26kg, easy for transport, save your labor cost, also light weight is convenient for installtion, assembly and disassembly.





DELICATE CABINET DESIGN

Linsn-Max- 960mm Series LED display



Specification

		Ind	Outdoor					
Pixel Pitch	2.604mm	2.976mm	3.91mm	4.81mm	3.91mm	4.81mm		
LED Type	SMD1515	SMD1515	SMD2121	SMD2121	SMD1820-1921	SMD2525-2727		
Density (dots/m²)	147456	112896	65025	43264	65025	43264		
Scan	1/32	1/14	1/16	1/13	1/16	1/13		
Module Resolution (dots)	96x96	84x84	64x64	52x52	64x64	52x52		
Cabinet Resolution	192x192	168x168	128x128	104x104	128x128	104x104		
Protective grade		IP	54		IP	65		
Brightness		800-10	00cd/m²		5500-65	00cd/m ²		
Module Size			250x2	250mm				
Cabinet Size	500x500x85mm							
Cabinet Weight			7.85	kg/pc				
Material			Magnes	ium alloy				
View Angle		140 de	egree (horizonta	al) 140 degree(vertical)			
Refresh rate			1920/3	3840 HZ				
Digital Processing			14/1	I6 Bit				
Gray Scale			16384	Level				
Colors	687 Million							
Color Temperature	4,500-8,500 Adjustable							
Brightness Control	255 N/A							
Contrast Ratio	4000:1 N/A							
Control Mode	Video Sync							
Lift time(50% brightness)		100,000 Hour						



SHENZHEN LINSN LED CO.,LTD.


Tel:+86-755-32925789 Mobile/ Skype/Whatsapp /Wechat:+13787050055 Website: www.linsnled.com LED Online Shop: www.ledinthebox.com

Address: Building 11, Sanlian Industrial Park, Shiyan Town, Bao'an District, Shenzhen, China.



Website: www.linsnled.com Tel:+86-755-32925789



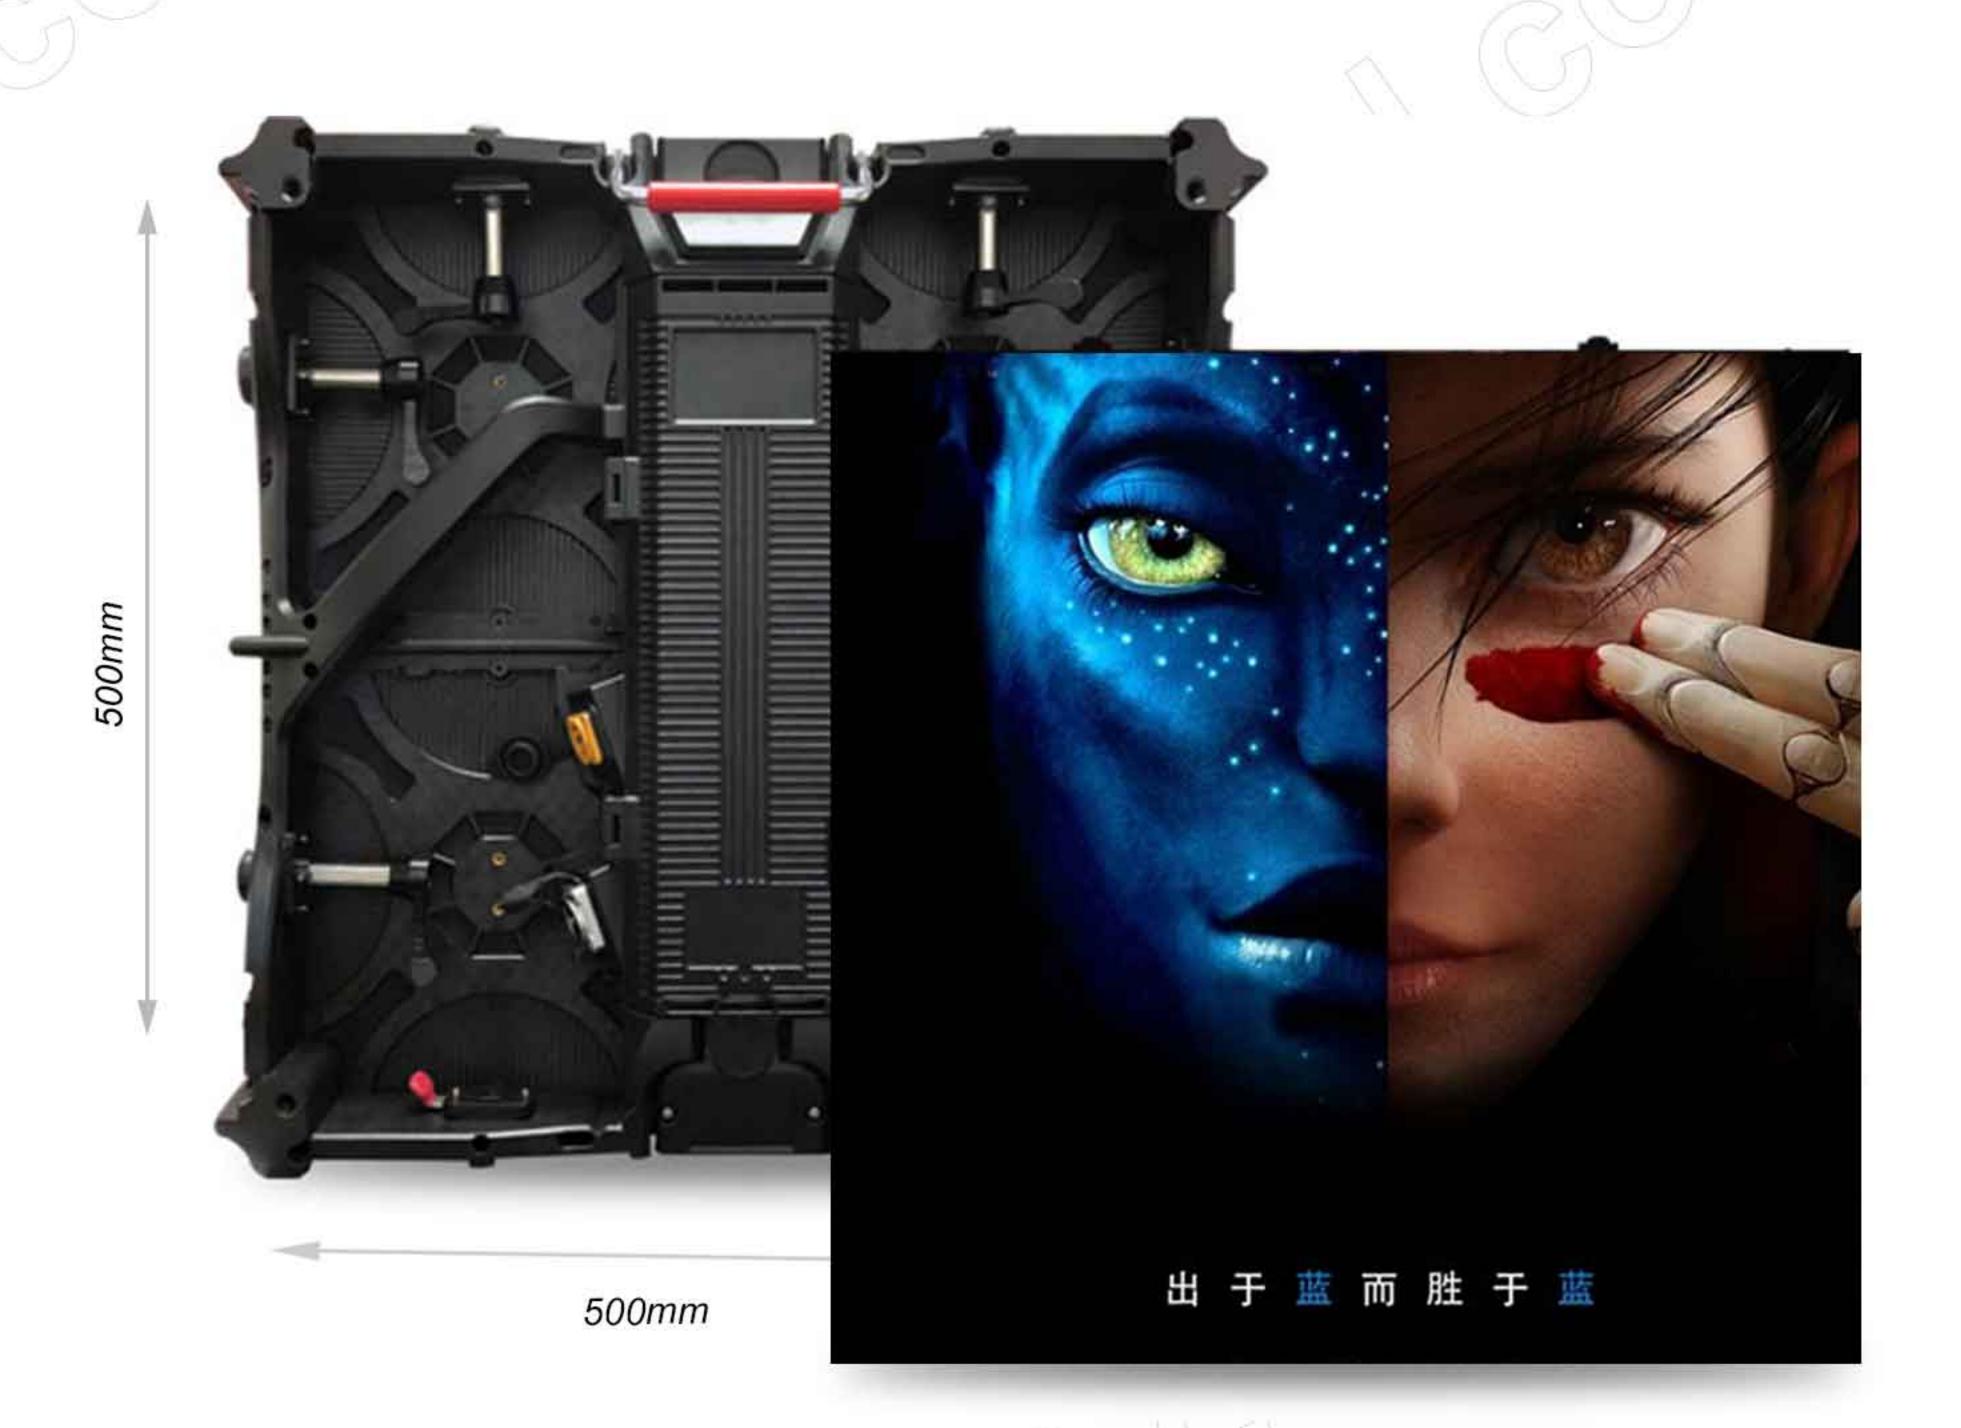


LINSN-MA-500x500

MA-500X500-P2.604 /2.976 /3.91 /4.81

LINSN-MA-500x500mm Rental Series LED display

LINSN-MA-500x500mm Rental Series Design innovation has its unique philosophy, Innovative structural design, avant-garde body lines, Give you extraordinary experience.

500mm Series Magnesium Alloy LED Display

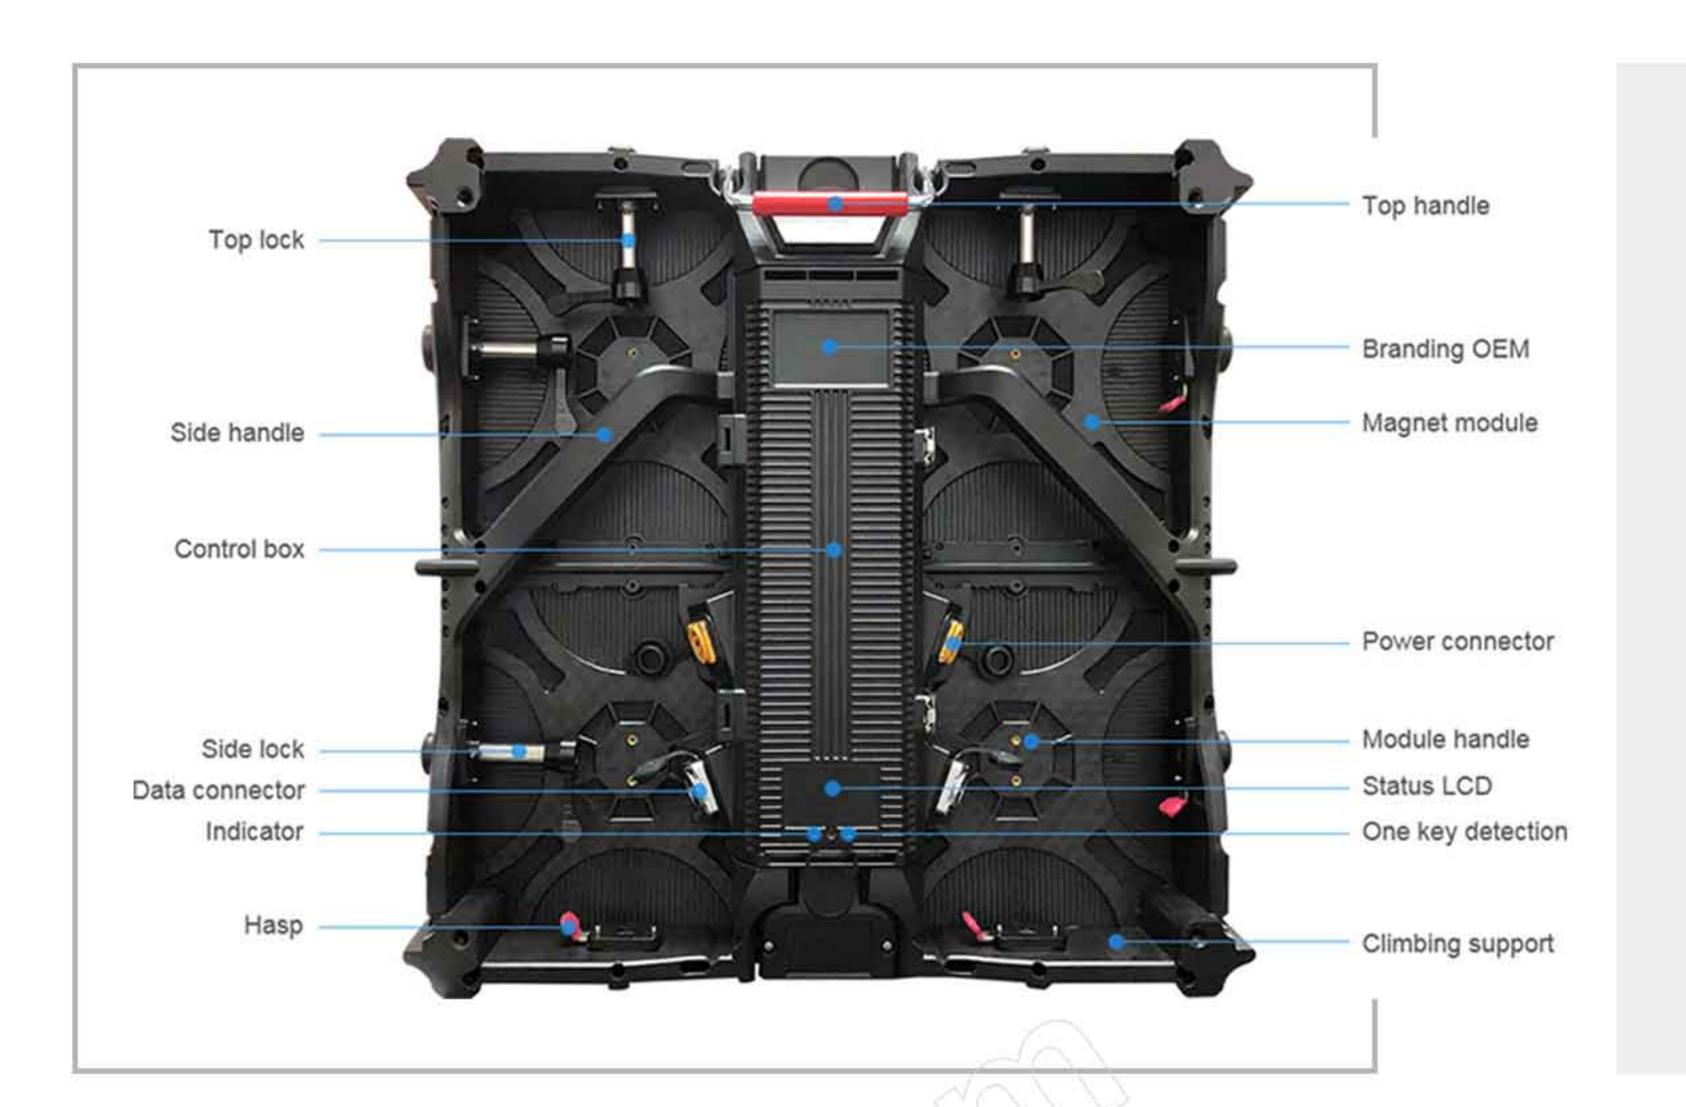

500mm Series Magnesium Alloy LED Display is Linsn representative product in LED display field, the productwith 1000mm series LED display arewidely used in stores, advertising, fashion show, rental event, enterprise, conference center and other LED display projects. This LED display cabinet is made by magnesium alloy materies, It's easy to install, overhaul, maintain and use because excellentstructure design and lightweight. The cabinet size is 500mm×500mm standard size to make it can be usedfor many pixels of LED panels which is 250×250mm size.

LIGHT AND THIN

Linsn magnesium alloy 500mm series led display cabinet is very thin which makes it ultra-lightweight and space saving. It Can be installed at any area without requiring much space. The light weight of 8kg/panel led screen is easy to carry, transport and install – saving good amount of money on your labor costs.





EXCELLENT QUALITY

Linsn magnesium alloy 500mm series cabinet with Hard Connnection, it is more realiable and easier repairing than other Soft Connection LED Cabinet. LED display features four high technologies and pointto-point correcting. High refresh rate, high gray scale level, high definition and high contrast rate present excellent quality picture output in every condition.

Accessories:



















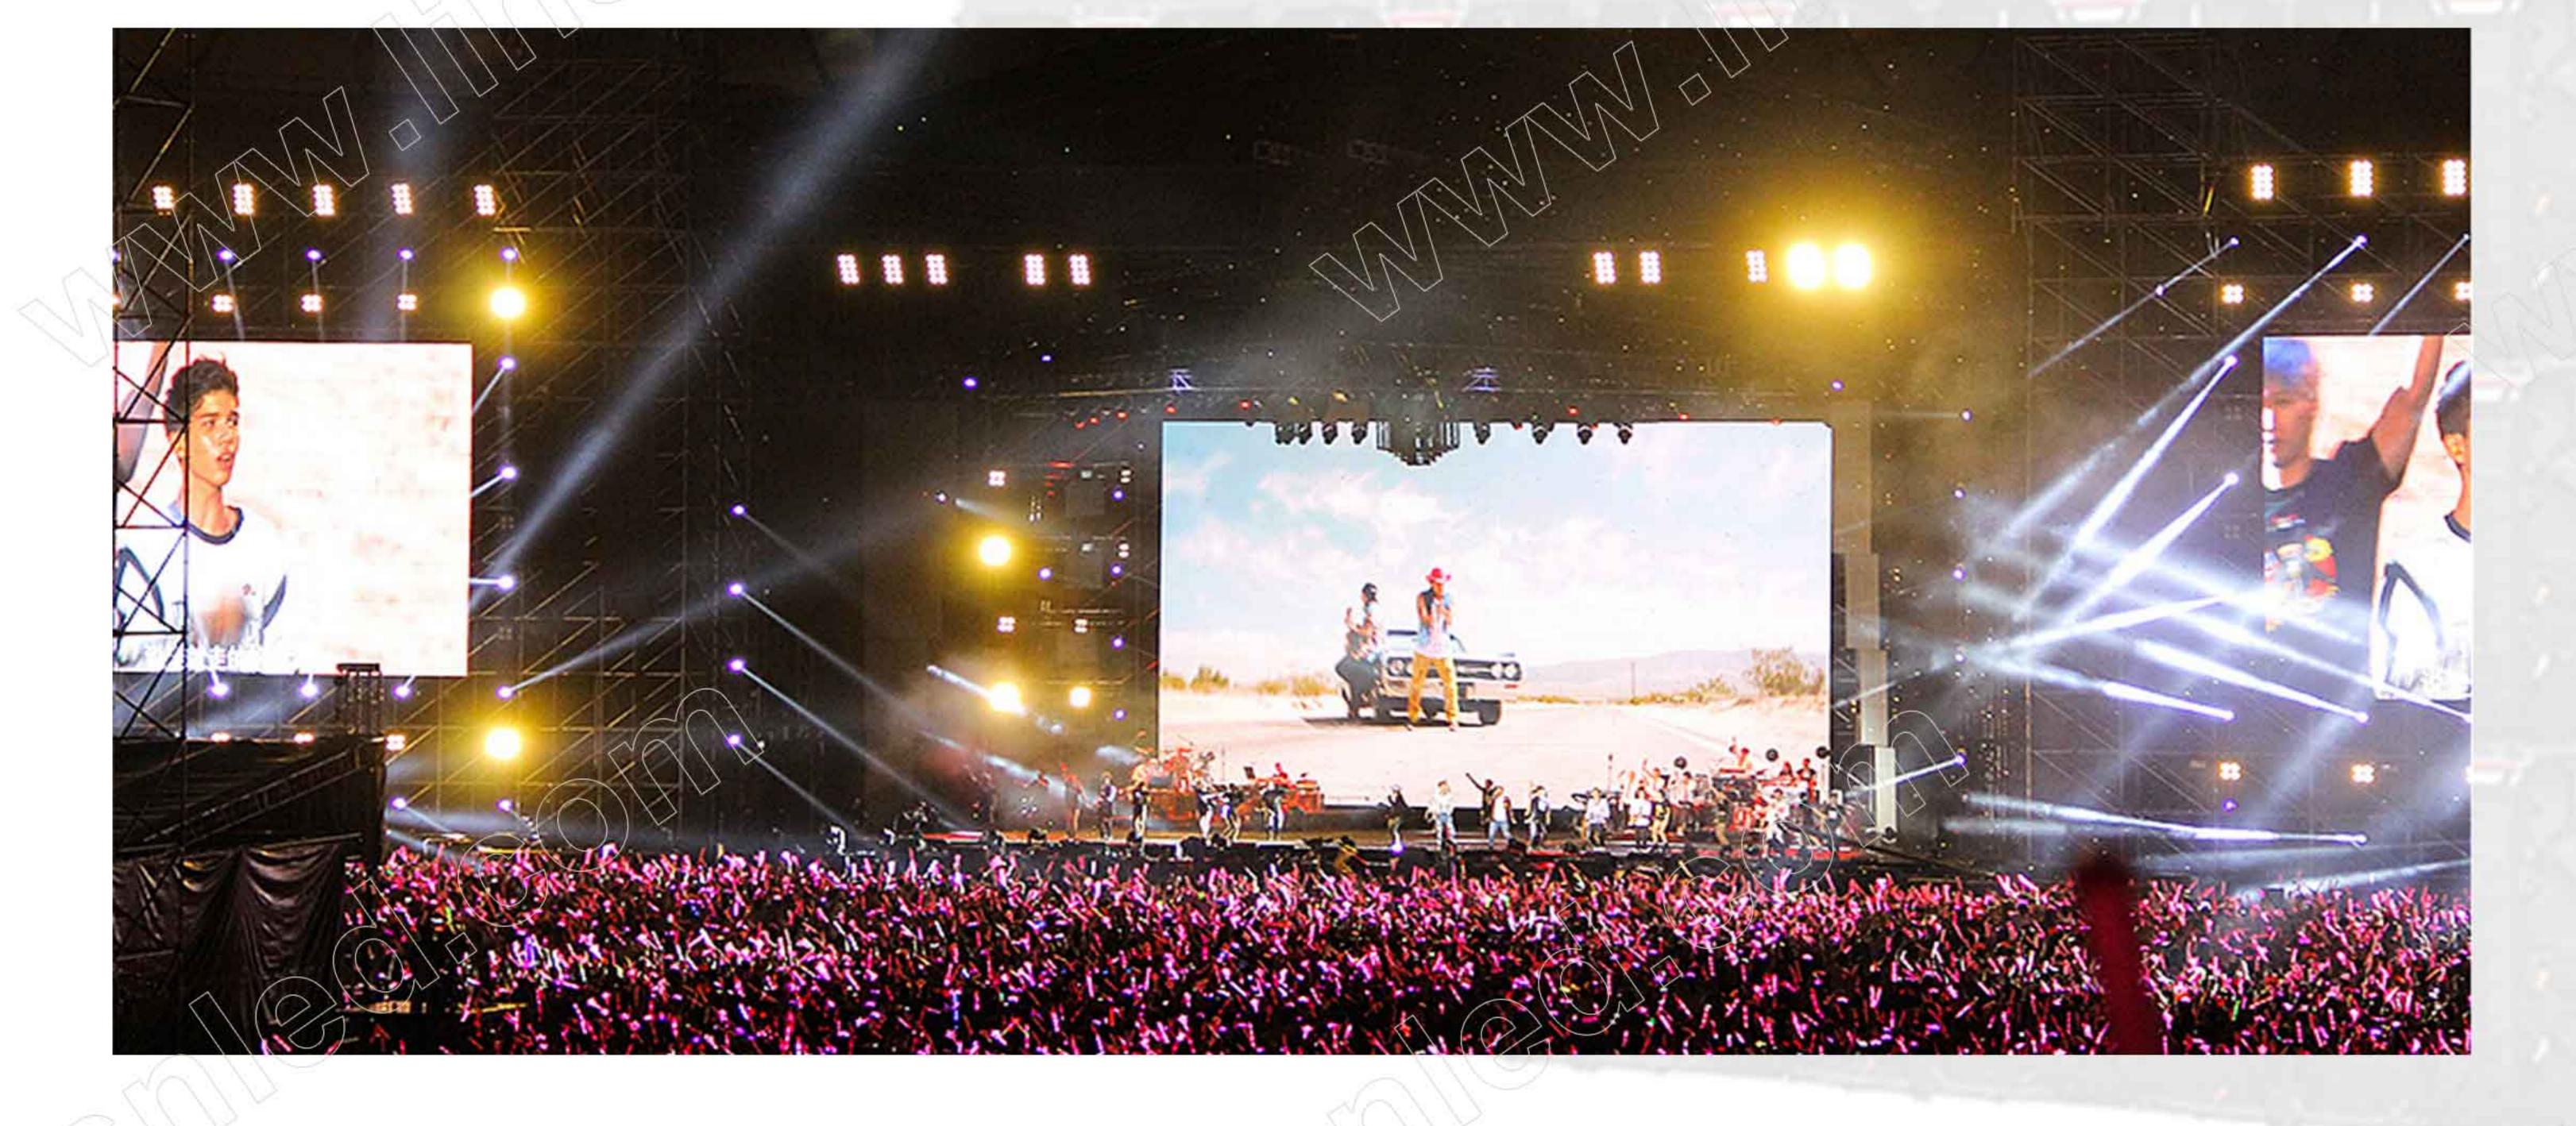


SEAMLESS DISPLAY AND VISUAL EFFECTS

The advanced assembled structure produces seamless display and visual effects, offering you the perfect visual performance you desire from your LED display. The picture quality remains high due to best quality display material.

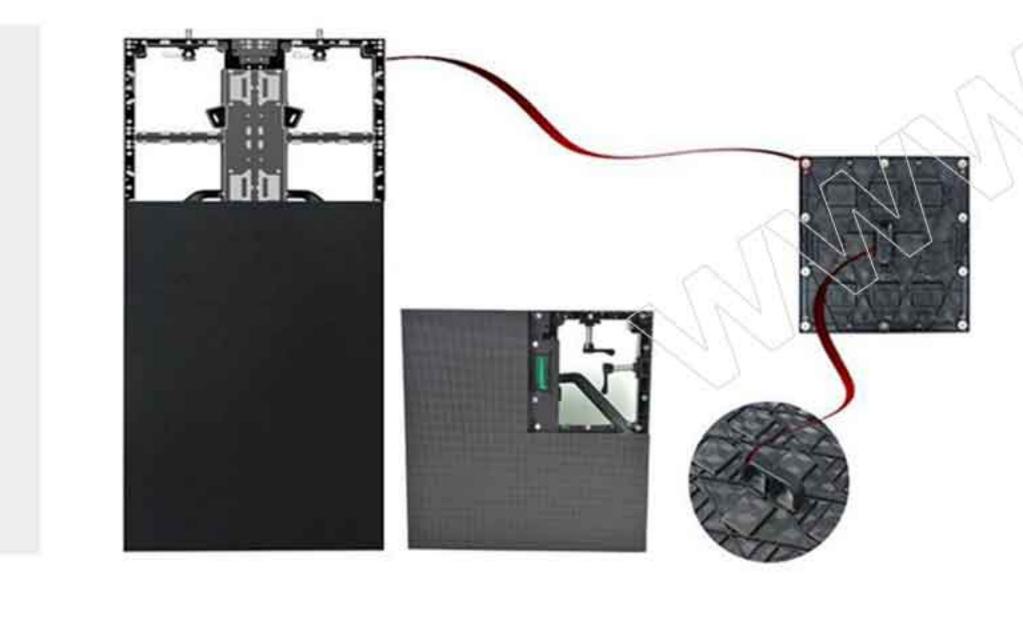



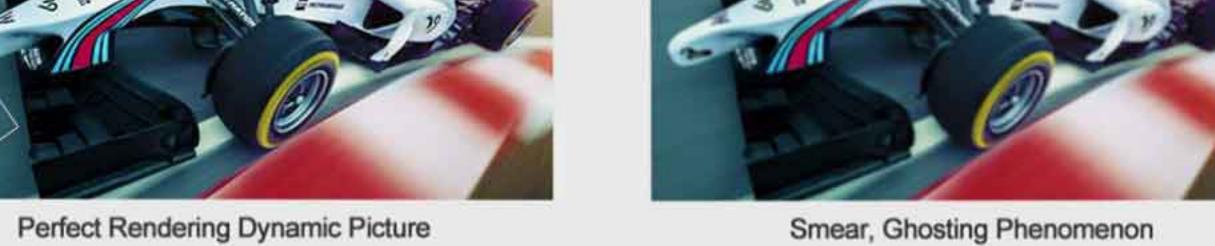

ULTRA FAST RESPONSE

The response speed exceeds the response limit of the naked eyes, while playing the high speed dynamic images in an LED Screen, it will have more advantages, there will be no ghosting&twisting and it will perfectly provide the dynamic images.

CURVED INSTALLATION

In order to meet the various aspects of the LED screen field. Unit magnesium alloy 500mm series led display design for Curved Installation. Curved with every 2.5° between -10° and 10°, which can make convex and concave.





Specification

		Ind	Outdoor						
Pixel Pitch	2.604mm	2.976mm	3.91mm	4.81mm	3.91mm	4.81mm			
LED Type	SMD1515	SMD1515	SMD2121	SMD2121	SMD1820-1921	SMD2525-2727			
Density (dots/m²)	147456	112896	65025	43264	65025	43264			
Scan	1/32	1/14	1/16	1/13	1/16	1/13			
Module Resolution (dots)	96x96	84x84	64x64	52x52	64x64	52x52			
Cabinet Resolution	192x192	168x168	128x128	104x104	128x128	104x104			
Protective grade		IP	54		IP	65			
Brightness		800-10	00cd/m²		5500-65	00cd/m ²			
Module Size			250x2	250mm					
Cabinet Size	500x1000x 85mm								
Cabinet Weight			12k	g/pc					
Material			Magnes	ium alloy					
View Angle		140 de	egree (horizonta	al) 140 degree(vertical)				
Refresh rate			1920/3	3840 HZ					
Digital Processing			14/1	16 Bit					
Gray Scale			16384	Level					
Colors	687 Million								
Color Temperature	4,500-8,500 Adjustable								
Brightness Control	255 N/A								
Contrast Ratio	4000:1 N/A								
Control Mode	Video Sync								
Lift time(50% brightness)		100,000 Hour							



SHENZHEN LINSN LED CO.,LTD.

Tel:+86-755-32925789 Mobile/ Skype/Whatsapp /Wechat:+13787050055 Website: www.linsnled.com LED Online Shop: www.ledinthebox.com

Address: Building 11, Sanlian Industrial Park, Shiyan Town, Bao'an District, Shenzhen, China.



Website: www.linsnled.com Tel:+86-755-32925789




LINSN-MA-500x1000

MA-500X1000-P2.604 /2.976 /3.91 /4.81

LINSN-MA-500x1000mm Rental Series LED display

LINSN-MA-500x1000mm Rental Series Design innovation has its unique philosophy, Innovative structural design, avant-garde body lines, Give you extraordinary experience.

1000 mm Series Magnesium Alloy LED Display

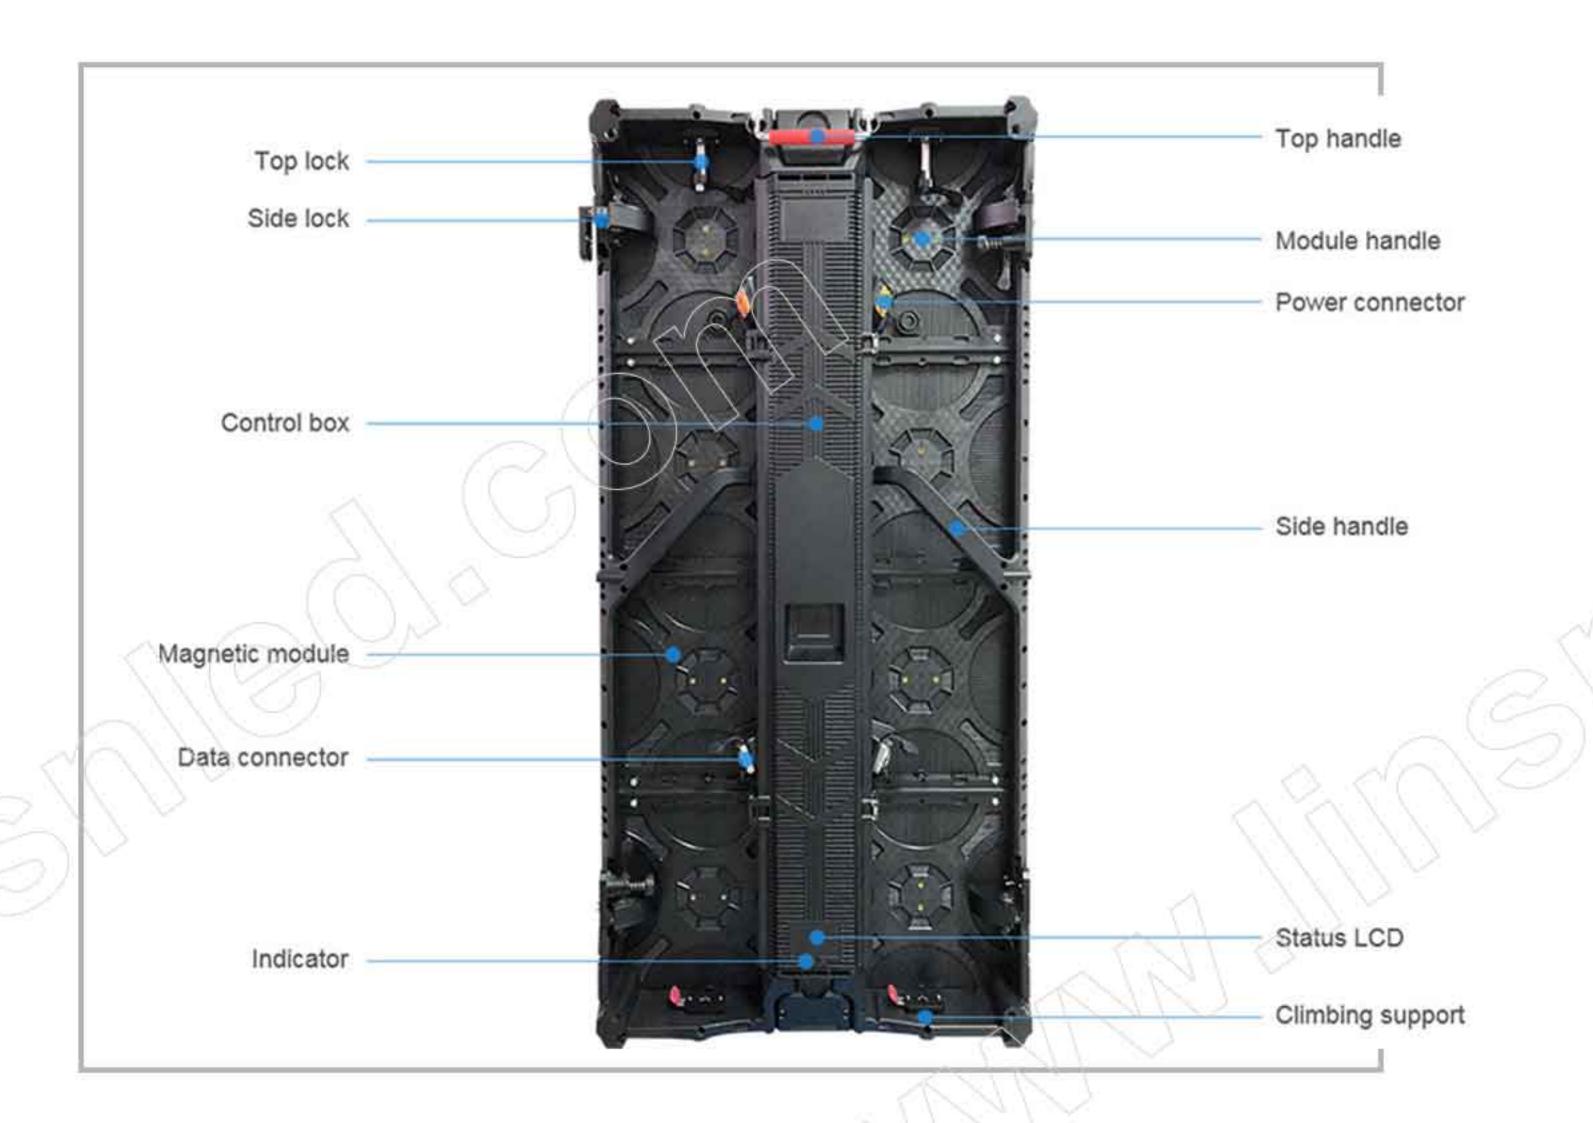

1000mm Series Magnesium Alloy LED Display is also our representative product as 500mm series LED display, this series product are widely used in stores, advertising, fashion show, rental event, enterprise, conference center and other LED display projects. The LED display cabinet is made by magnesium alloy materies, It's easy to install, overhaul, maintain and use because excellent structure design and lightweight. The cabinet size is 500mm×1000mm standard size to make it can be used for many pixels of LED panels which is 250×250mm size.

LIGHTWEIGHT AND THIN

Linsn magnesium alloy 1000mm series led display cabinet is very thin which makes it ultra-lightweight and space saving. It Can be installed at any area without requiring much space. The light weight of 12kg/panel led screen is easy to carry, transport and install - saving good amount of money on your labor costs.





EXCELLENT QUALITY

Linsn magnesium alloy 1000mm series cabinet with Hard Connnection, it is more realiable and easier repairing than other Soft Connection LED Cabinet. LED display features four high technologies and pointto-point correcting. High refresh rate, high gray scale level, high definition and high contrast rate present excellent quality picture output in every condition.

Accessories:





Data Cable





Main Data Cable












SEAMLESS DISPLAY AND VISUAL EFFECTS

The advanced assembled structure produces seamless display and visual effects, offering you the perfect visual performance you desire from your LED display. The picture quality remains high due to best quality display material.

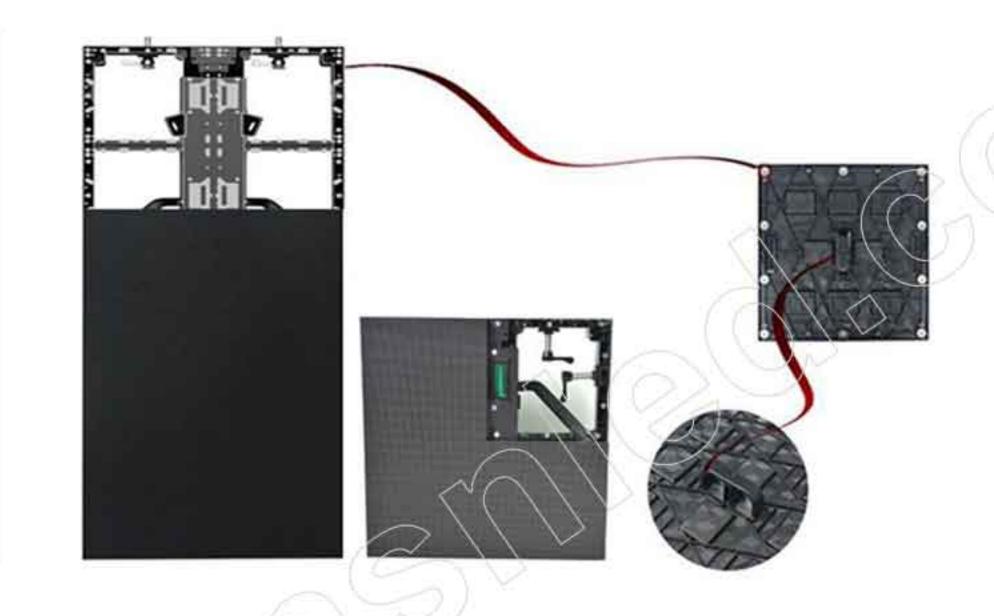





Smear, Ghosting Phenomenon

ULTRA FAST RESPONSE

The response speed exceeds the response limit of the naked eyes, while playing the high speed dynamic images in an LED Screen, it will have more advantages, there will be no ghosting&twisting and it will perfectly provide the dynamic images.

CURVED INSTALLATION

In order to meet the various aspects of the LED screen field. Unit magnesium alloy 500mm series led display design for Curved Installation. Curved with every 2.5° between -10° and 10°, which can make convex and concave.



Specification

		Ind	Outdoor					
Pixel Pitch	1.953mm	2.604mm	3.91mm	4.81mm	3.91mm	4.81mm		
LED Type	SMD1515	SMD1515	SMD2121	SMD2121	SMD1921	SMD2525-272		
Density (dots/m²)	262144	147456	65025	43264	65025	43264		
Scan	1/32	1/32	1/16	1/13	1/16	1/13		
Module Resolution (dots)	128x128	96x96	64x64	52x52	64x64	52x52		
Cabinet Resolution	256x256	192x192	128x128	104x104	128x128	104x104		
Protective grade		IP	54			P65		
Brightness		800-100	00cd/m²		4500-5	5000cd/m²		
Cabinet Weight		7.5kg/pc						
Module Size		250x250mm						
Cabinet Size	500x500x85mm							
Material			Magnes	ium alloy				
View Angle		140 de	egree (horizonta	ıl) 140 degree(v	ertical)			
Refresh rate		AN)	1920/3	8840 HZ				
Digital Processing			14/1	6 Bit				
Gray Scale	16384 Level							
Colors	687 Million							
Color Temperature	4,500-8,500 Adjustable							
Brightness Control	255 N/A							
Contrast Ratio	4000:1 N/A							
Control Mode	Video Sync							
Lift time(50% brightness)			100,00	00 Hour				



SHENZHEN LINSN LED CO.,LTD.

Tel:+86-755-32925789 Mobile/ Skype/Whatsapp /Wechat:+13787050055 Website: www.linsnled.com LED Online Shop: www.ledinthebox.com

Address: Building 11, Sanlian Industrial Park, Shiyan Town, Bao'an District, Shenzhen, China.



Website: www.linsnled.com Tel:+86-755-32925789



LINSN-Magic-500

Magic-500-P1.953/2.976/3.91/4.81

Rental LED display with front and back maintenance and flexible assembly

Linsn magic 500 Series Indoor & outdoor led display is LINSN latest LED display product with unique design and feature. the back cover is Removable the display visual effect is better, the image and video is more clean with uniformity color.

Magic-500-P1.953/2.976/3.91/4.81

As a professional LED display manufacturer, LINSN Magic 500 Series LED display is inspired by the unity of design and elegance with the features of Texture, Nimble, Professional, Flat and Handy. It's a more mature and more stable LED display product with the features of solid, easy, simple, precise, fast the product can meet various requirements of indoor & outdoor applications.







LIGHTWEIGHT AND THIN

Magic500 Series LED display cabinet is portable and good stability with weight of 7.1kg of indoor led display and 7.5kg of outdoor LED display, the cabinet thickness is only 80mm. the cabinet size is 500×500mm.the feature of lightweight make the LED display is easy to carry, transport and install, saving good amount of money on your labor costs.

PERFECT STRUCTURE

Magic 500 Series LED display with perfect cabinet from lifting handle, fast locks, panel handle, removable power & receiving box, power & signal indicator, power connector, signal connector.







HIGH QUALITY MODULE

Magic 500 Series LED Display use Mask with screws. Convex surface No deformation. Strengthen edges, the LED display is High contrast ratio, High uniformity, High flatness and High alignment.

Ultra viewing angle. Anti-collision protection for LEDs.

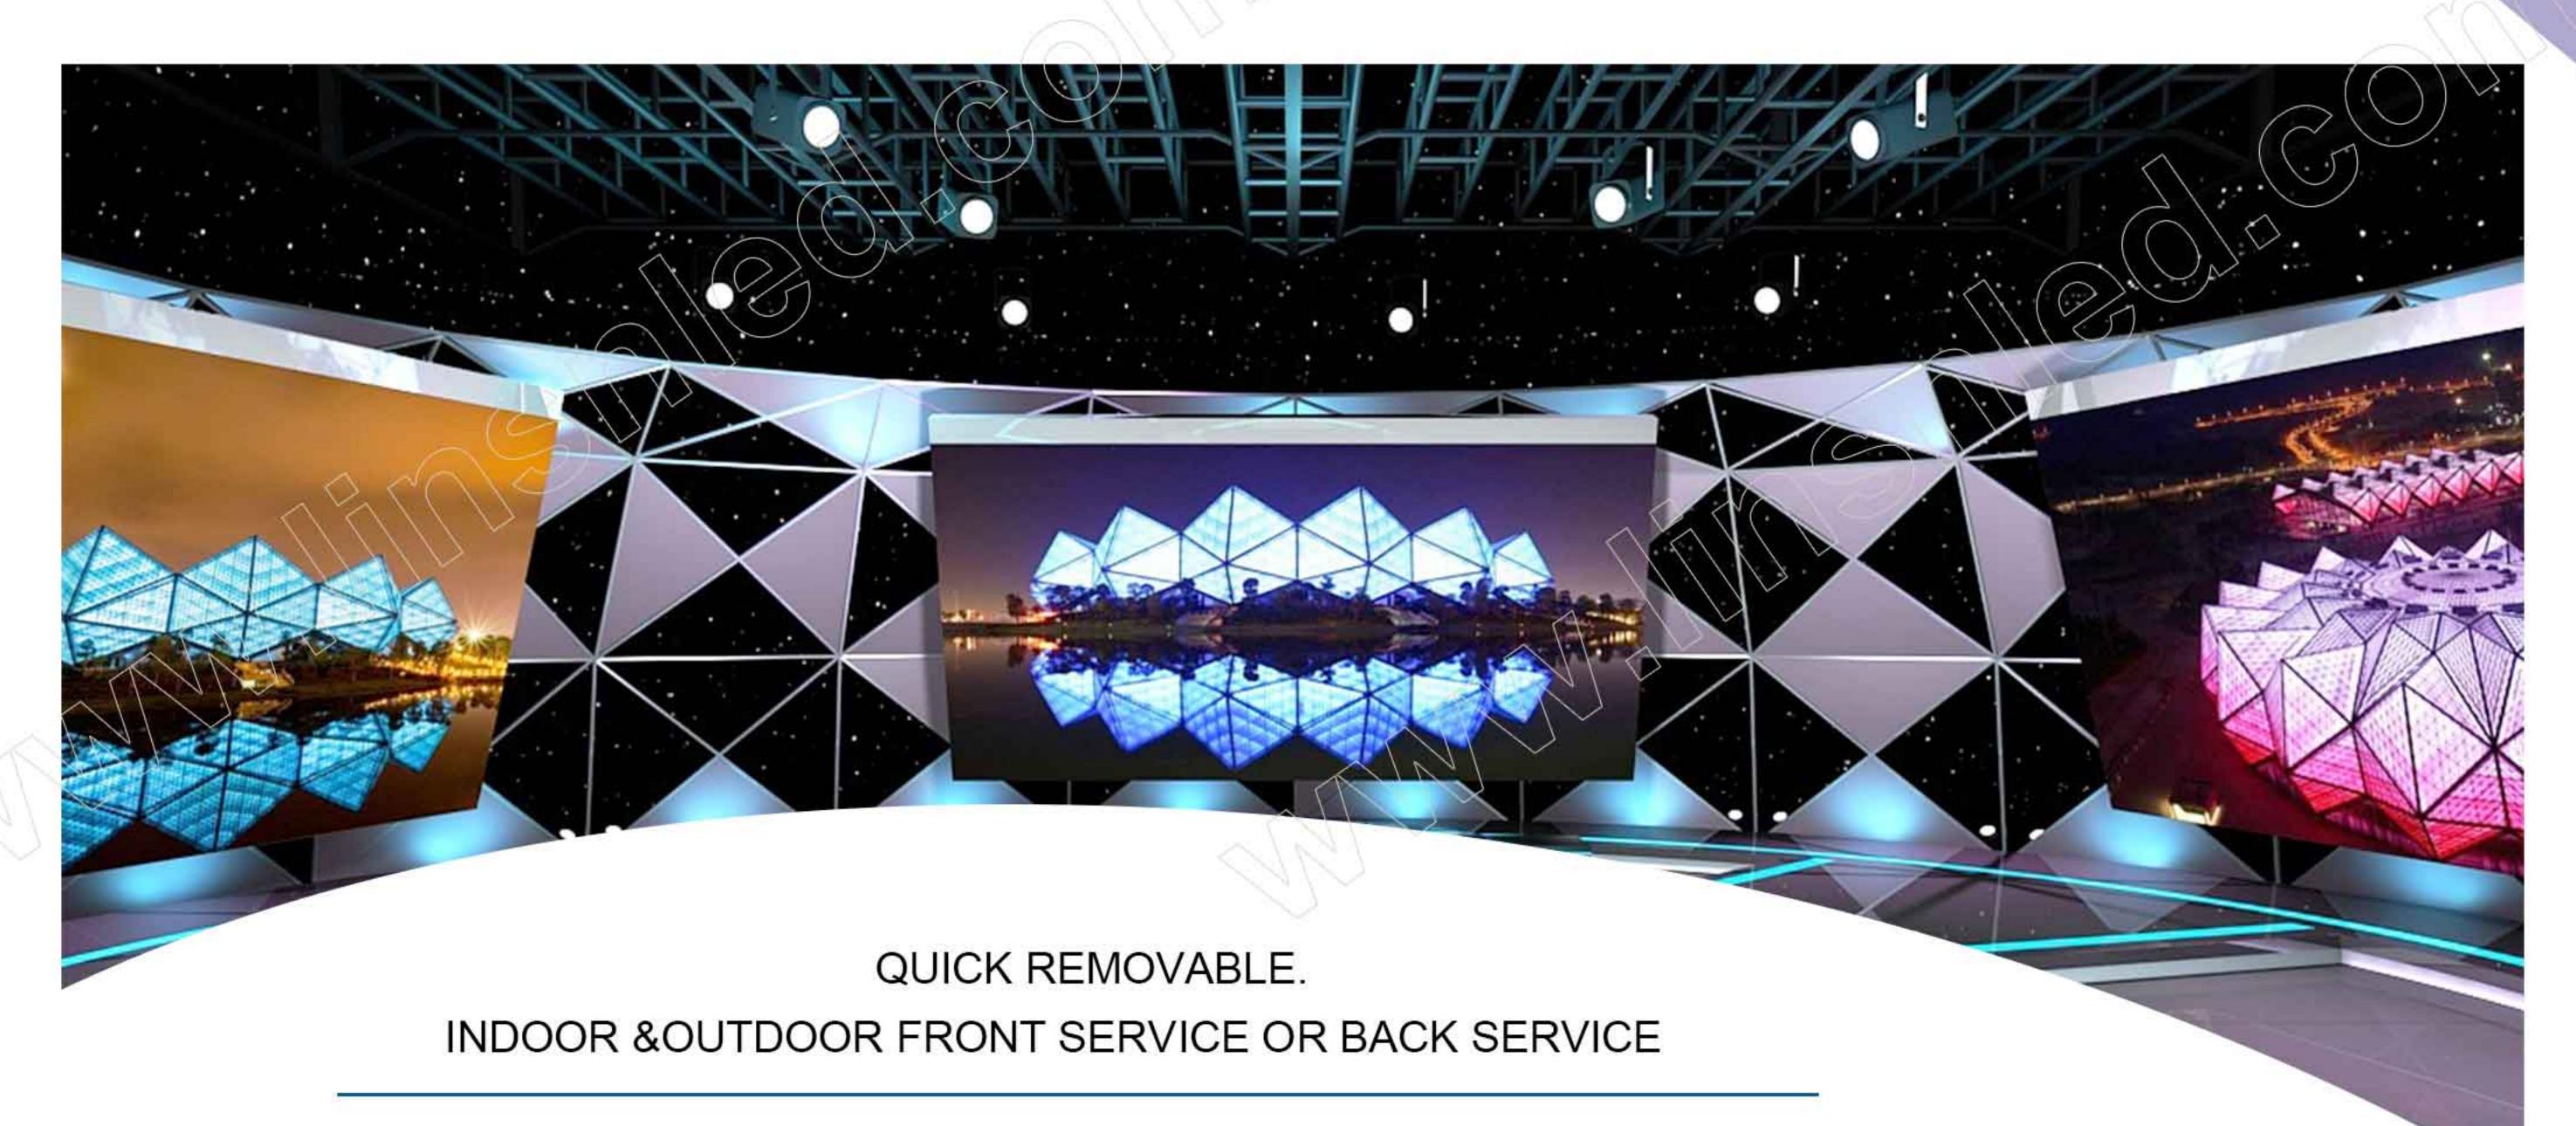

Magic 500 Series LED display is designed with quick removable back cover for Power & Receiving box & hub board & connectors. Magnetic front service or Back service with screw. Strong handle for LED module. All modules share a cabinet and power control box. These Professional designs make maintenance easier and faster .the procuct is for different pixel pitches of indoor & outdoor installation.

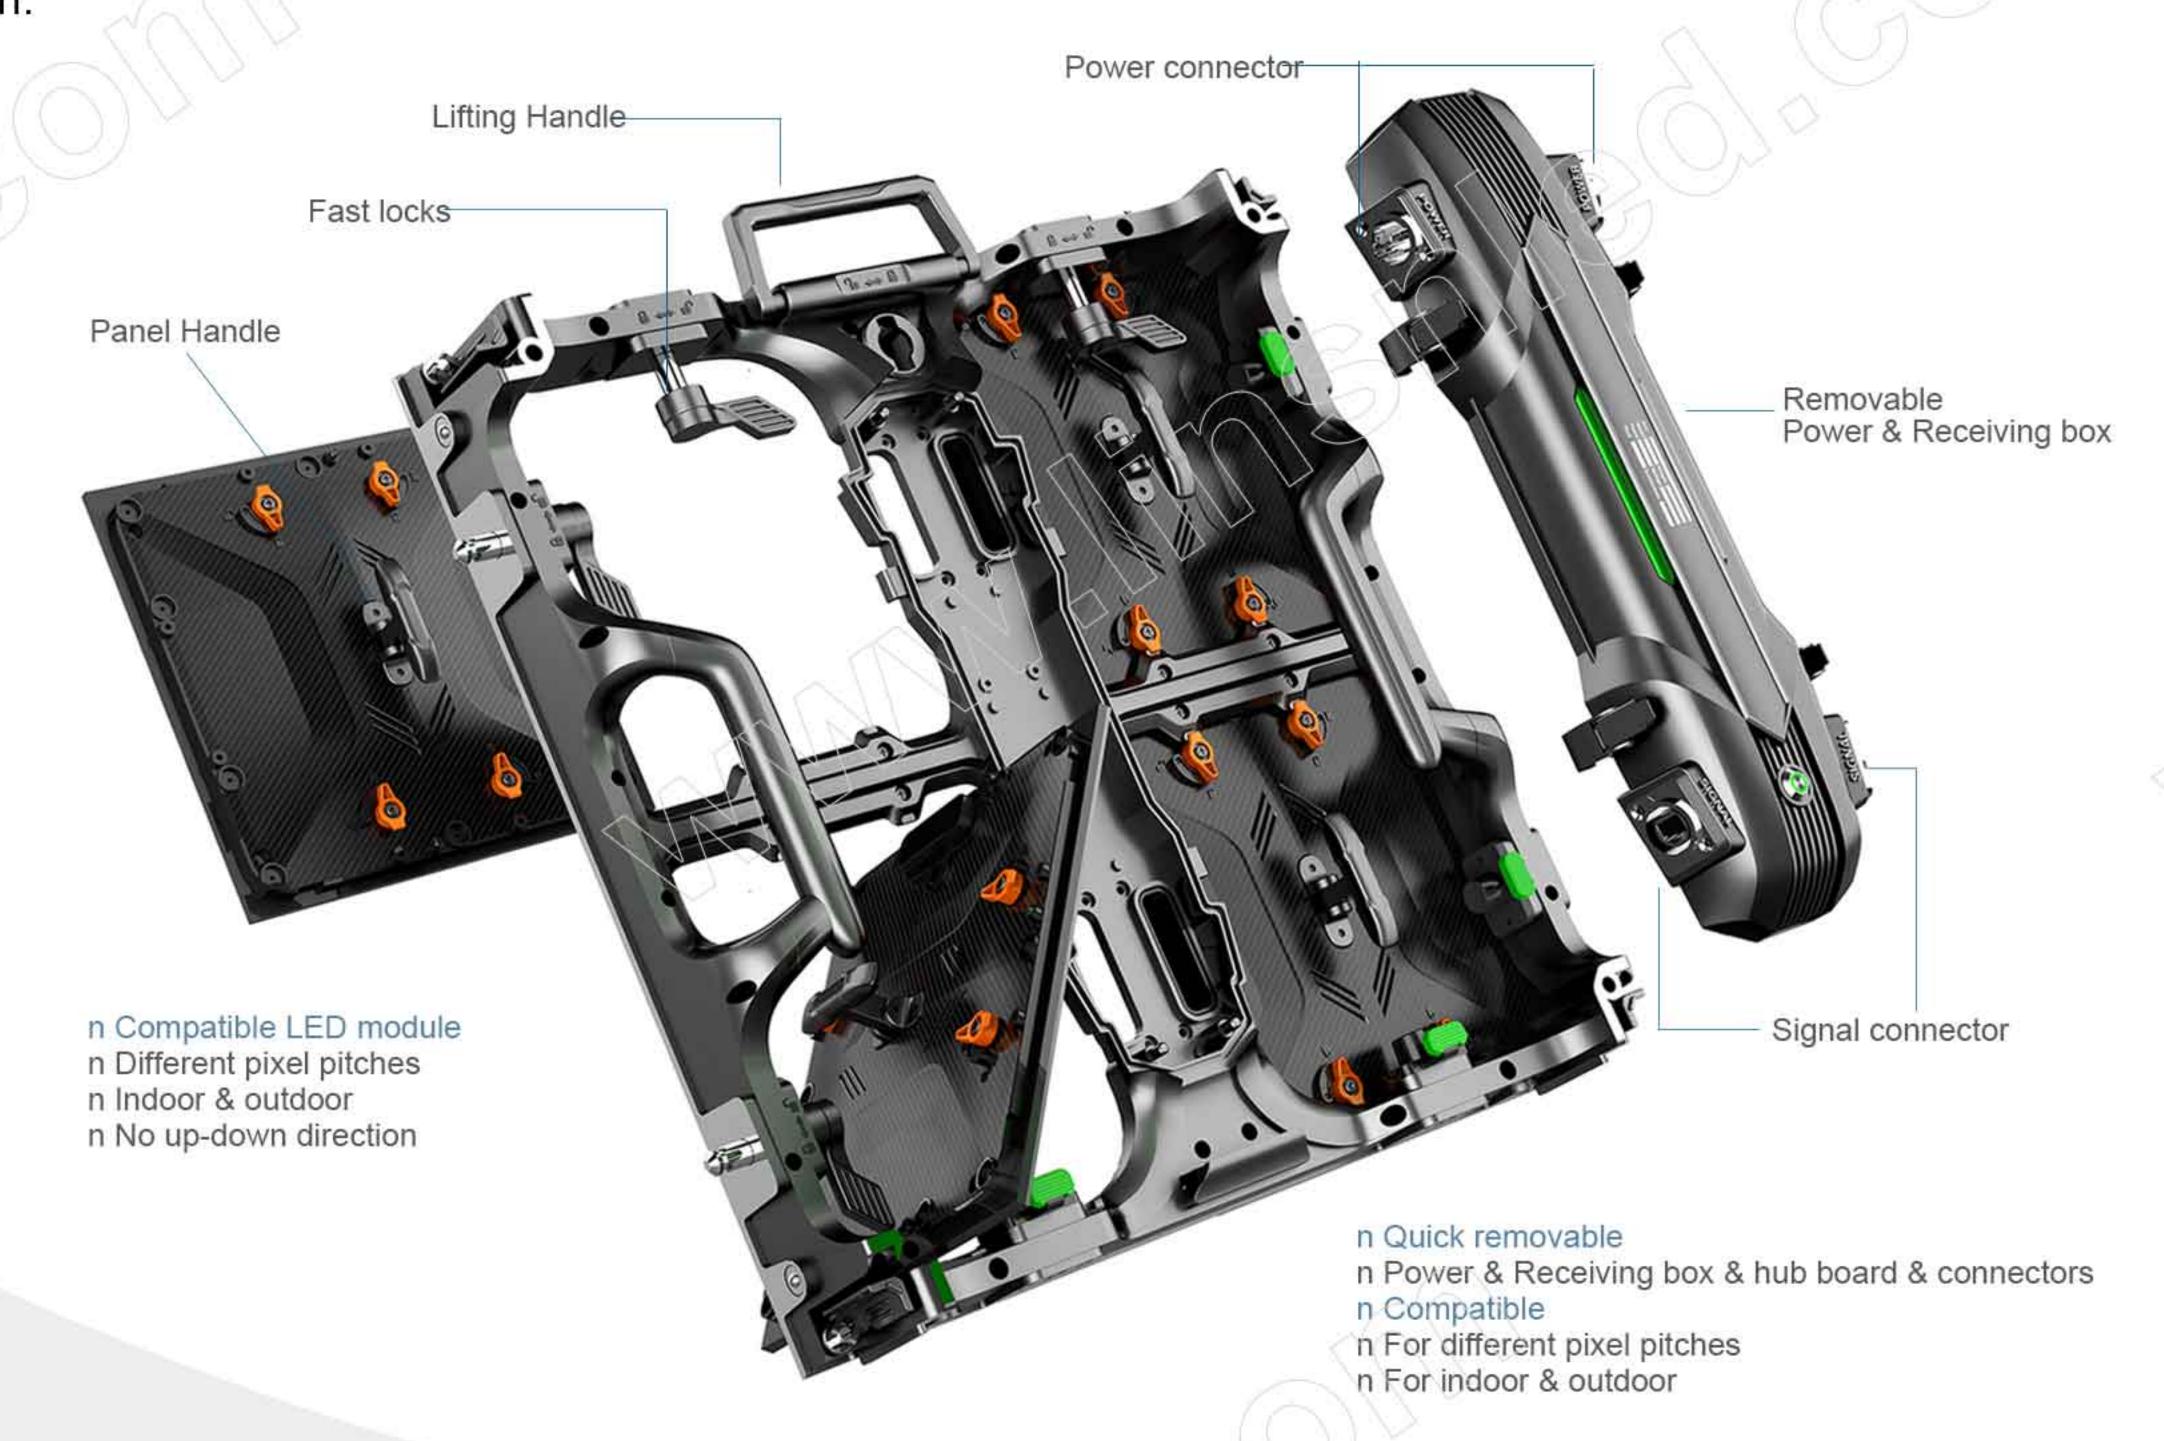




EXCELLENT QUALITY, EASY INSTALLATION

Magic 500 Series LED Display use Black LED. the product is High refresh rate, high contrast ratio, no ghosting. Excellent visual quality, zero-gap alignment. No AB module (no up and down direction installation) Strengthen housing structure design, no deformation. display is very easy for installation with Human engineering design.

INSTALLATION WAY

Magic500 Series LED Display can be installed with Ground Stack Installation, Hanging Installation, Special shape / Panel Dislocation Installation, Concave & convex installation Easy, fast, quickly and save time.

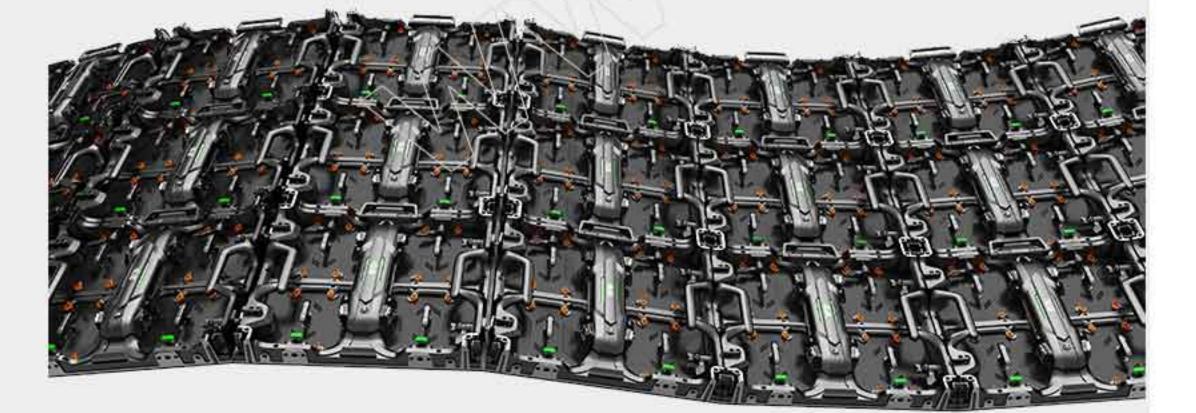

Specification

	Inc	loor	Outdoor				
Pixel pitch	P2.976	P3.91	P3.91	4.81			
LED configuration	SMD1515	SMD2020	SMD1921	SMD1921			
Brightness	1000 nits	1100 nits	4500 nits	4500 nits			
Panel weight	7.3kg / 16.09lbs	7.1kg / 15.65 lbs	7.8kg / 17.19lbs	7.7kg / 16.97lbs			
Scan mode	1/28	1/16	1/16	1/13			
Power consumption (Avg)	200W/sqm	200W/sqm	200W/sqm	200W/sqm			
Power consumption (Max)	640W/sqm	680W/sqm	640W/sqm	680W/sqm			
Working temperature	-20°C~60°C	-20°C~60°C	-20°C~60°C	-20°C~60°C			
IP rating	IP31	IP31	IP65	IP65			
Viewing angle	160°/ 160° (50% brightn	ess)					
Refresh rate	1920/3840Hz						
Processing	14 bits						
Module size	250mm x 250mm x 17m	m (W x H x D)					
Panel size	500mm x 500mm x 78mm (W x H x D)						
Input voltage	AC100~240V 50/60 HZ						
Life span	100,000 hrs						
Warranty	24 months						



SHENZHEN LINSN LED CO.,LTD.

Tel:+86-755-32925789 Mobile/ Skype/Whatsapp /Wechat:+13787050055 Website: www.linsnled.com LED Online Shop: www.ledinthebox.com

Address: Building 11, Sanlian Industrial Park, Shiyan Town, Bao'an District, Shenzhen, China.



Website: www.linsnled.com Tel:+86-755-32925789





LINSN-MAX-500-D

MAX-500-D-P2.976/3.91/4.81

An LED screen with front and back maintenance and flexible assembly

Optional indoor and outdoor, module magnetic installation, front and rear maintenance, aluminum cabinet, ultra-hight flatness, whole screen flatness error less than or equal to 0.01mm. The cabinets of different batches are of the same size, solid and durable, not easy to deform, protection good, protection level IP31/ IP65, weather and salt spray corrosion resistance

MAX-500-D-P2.976/3.91/4.81

Ligh:500*500mm,7.5~7.85kg/cabinet ;one person can carry,installation saves time and effort.

Thin: die-casting aluminum, hight-strength, hight-tenacity, high-precision, not easy to deform, thickness only for 8cm.

Flat :flatness error less than or equal to 0.1mm ,effectively eliminate mosaic phebomenon.


Fast: cabinet UDLR use fast lock , tow seconds locked adjacent cabinets, air plug wiring connect more fast.

Easy :magnetic modular design , any position breakdown can easy to front/back service and installation.

Allow :compatibility design , allow indoor and outdoor liftoing ,allow various dot pitch .

Height: hight-gray, high-refresh, gray 13bit, refresh rate 1920/3840Hz.

Low: heat dissipation design,no need fan and air conditioner, low noise, less weight, low power dissipation.

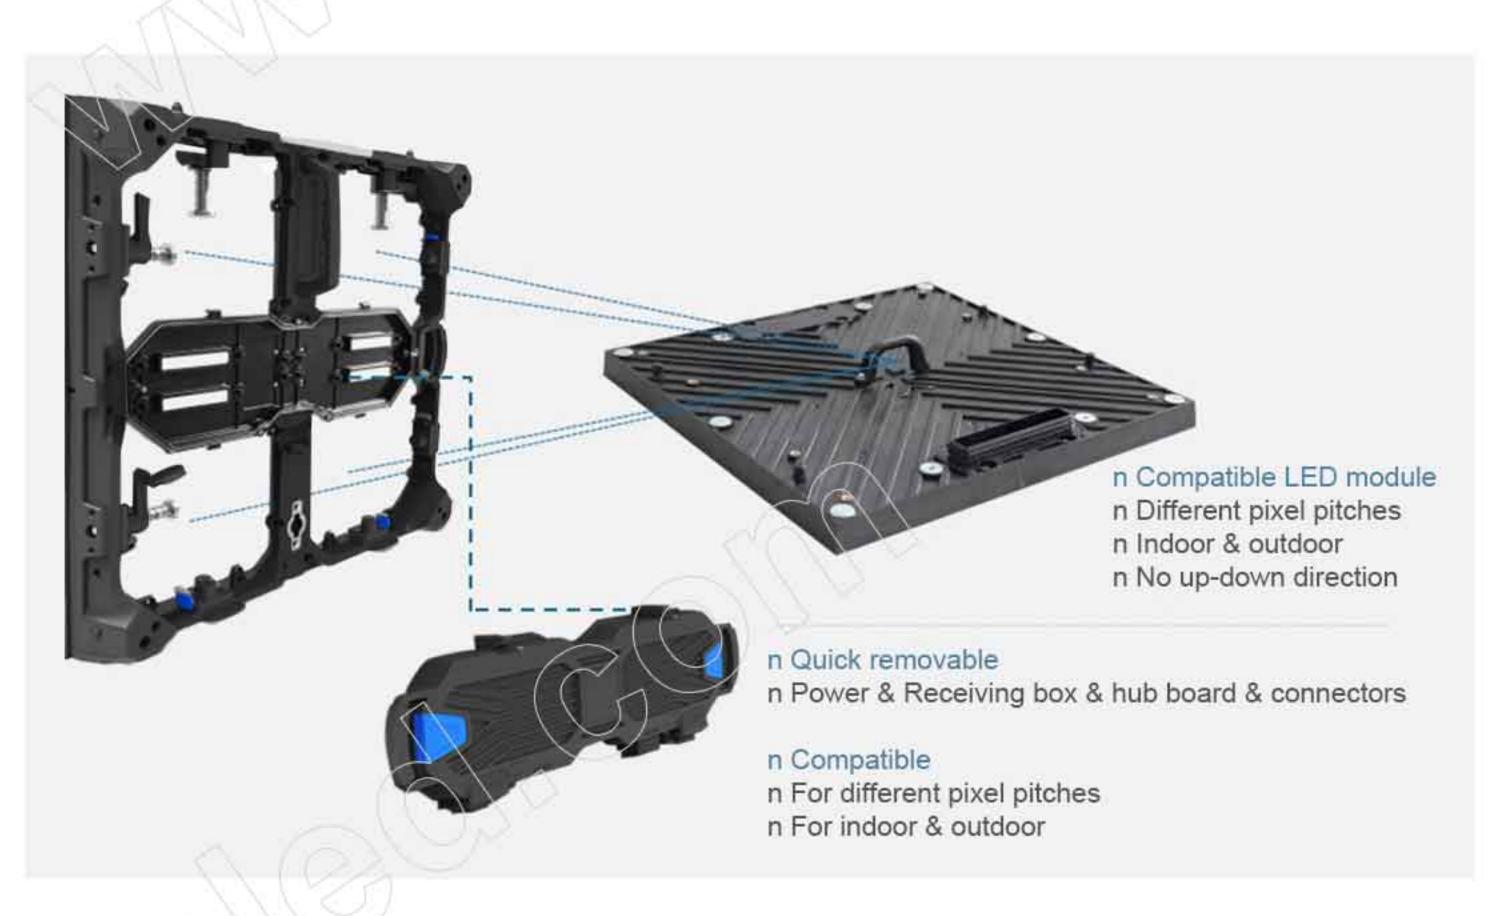















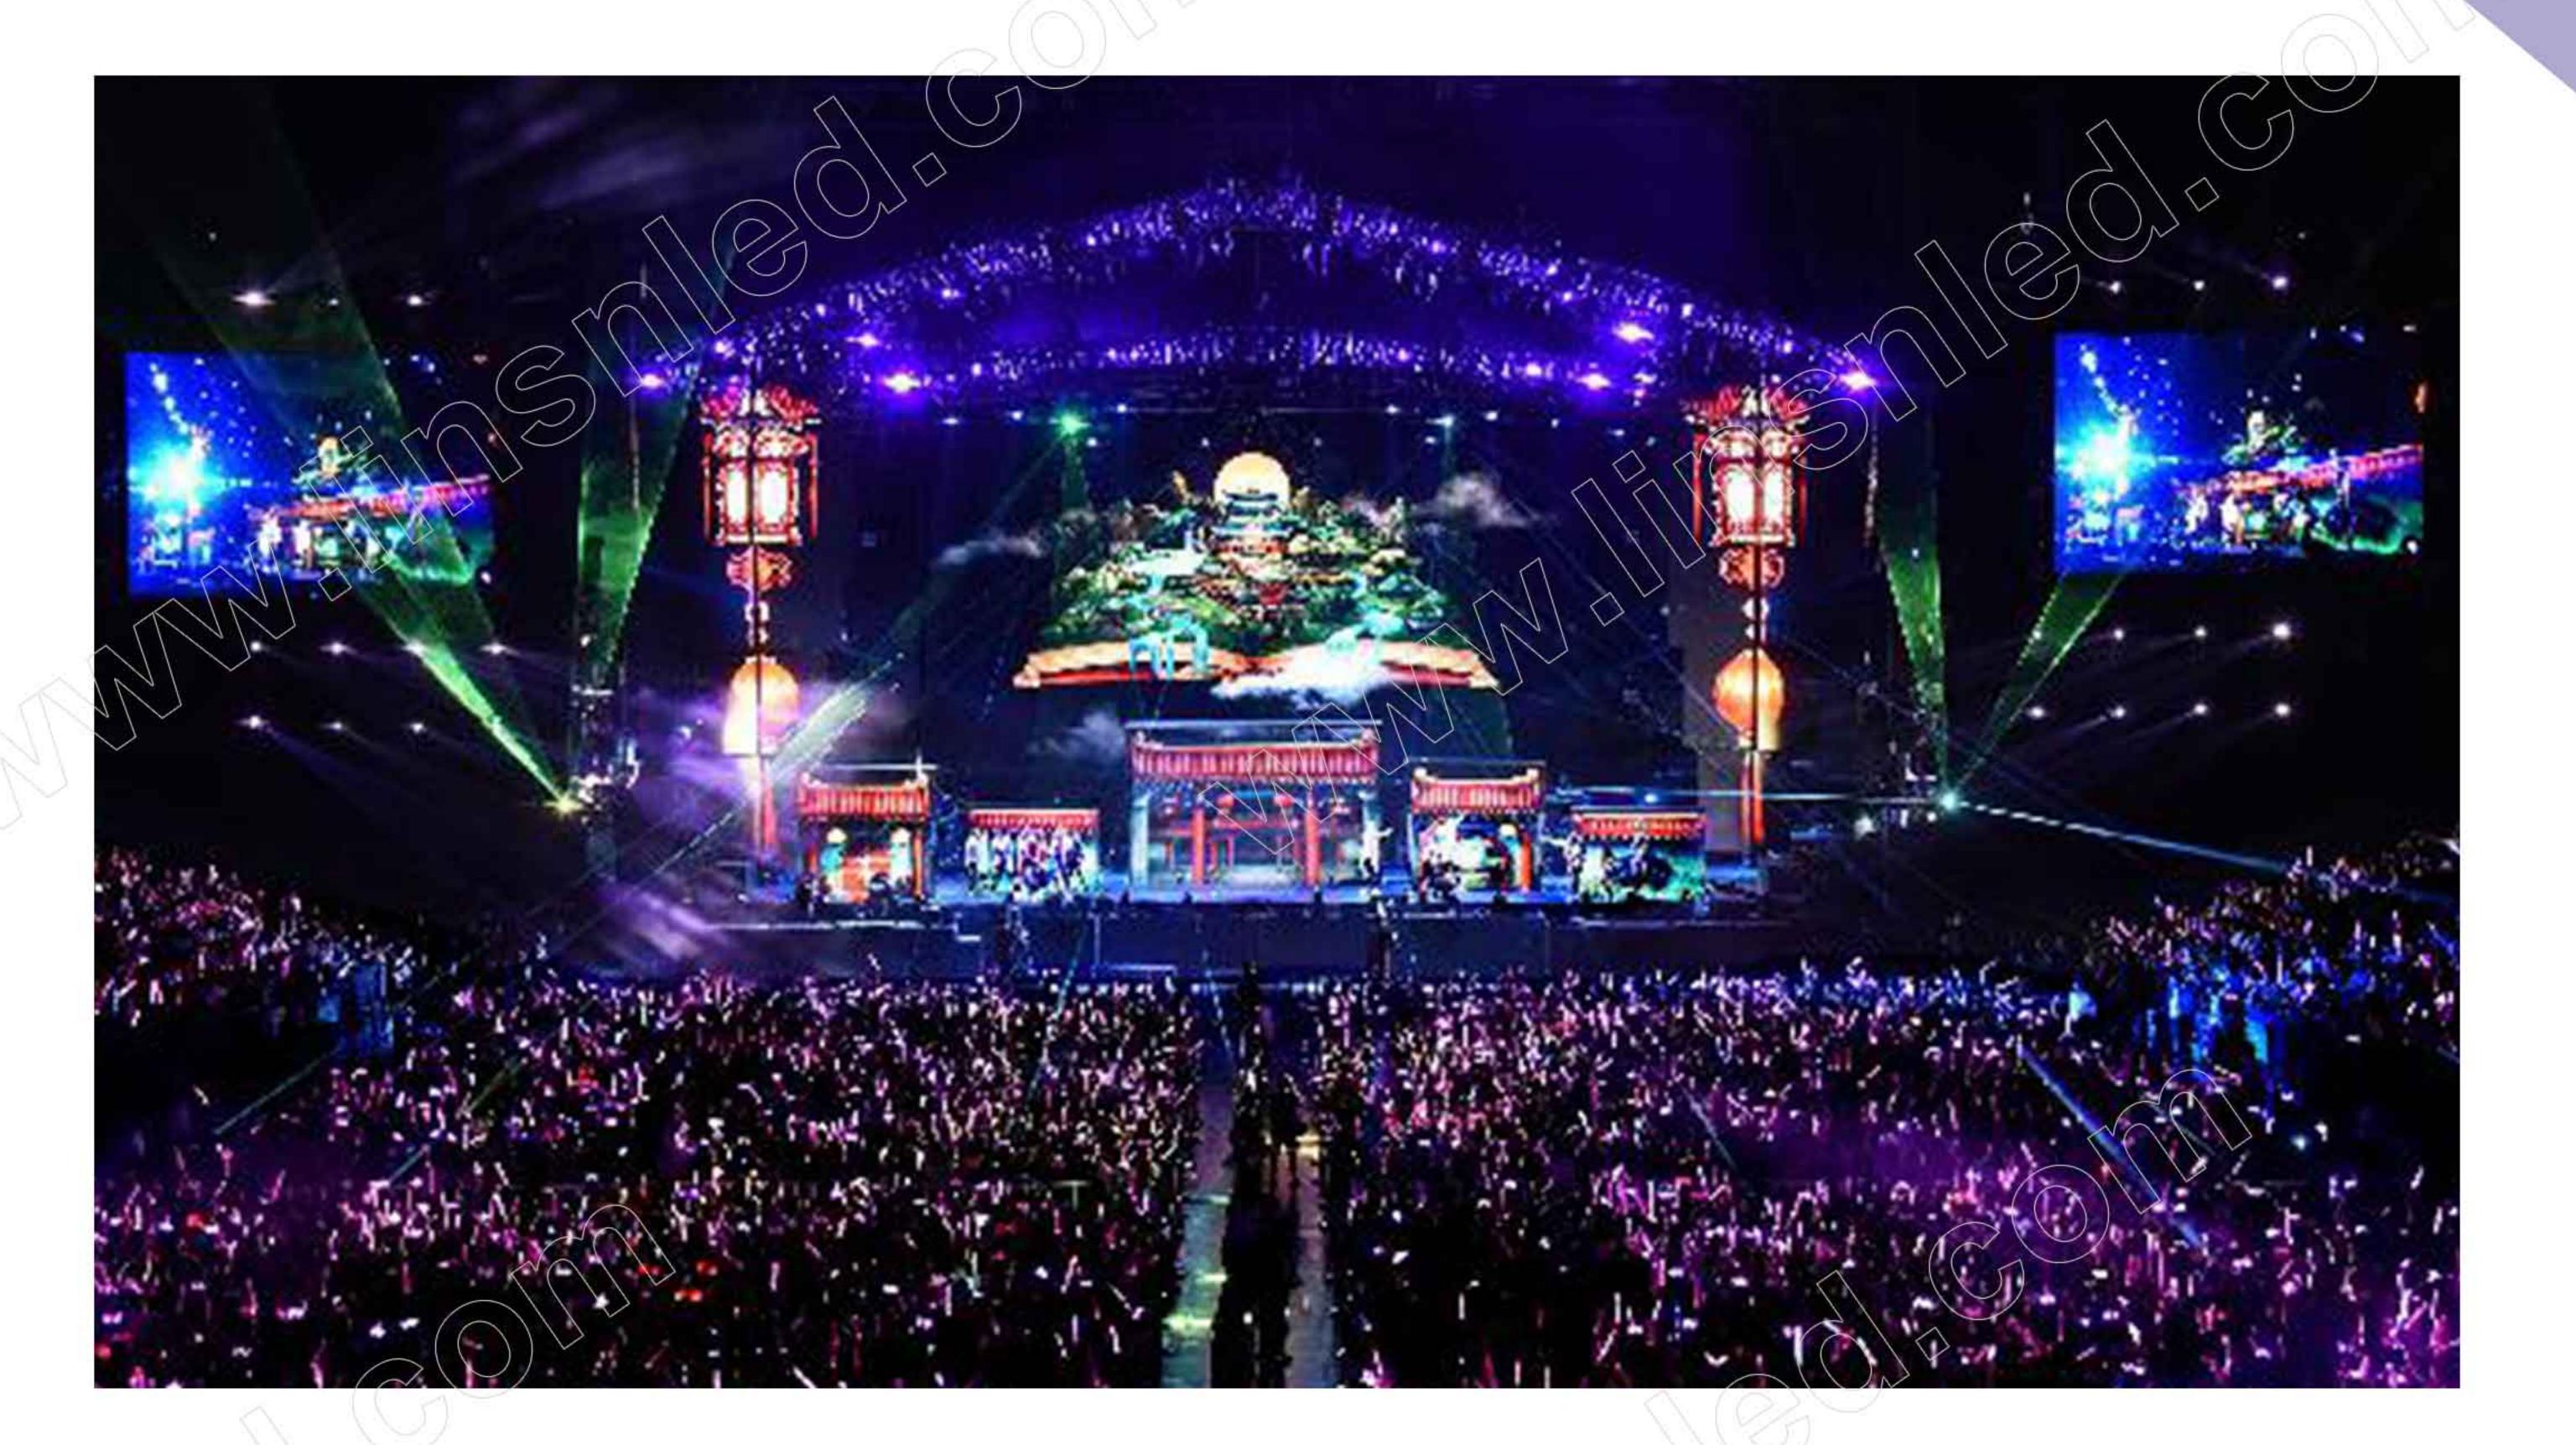

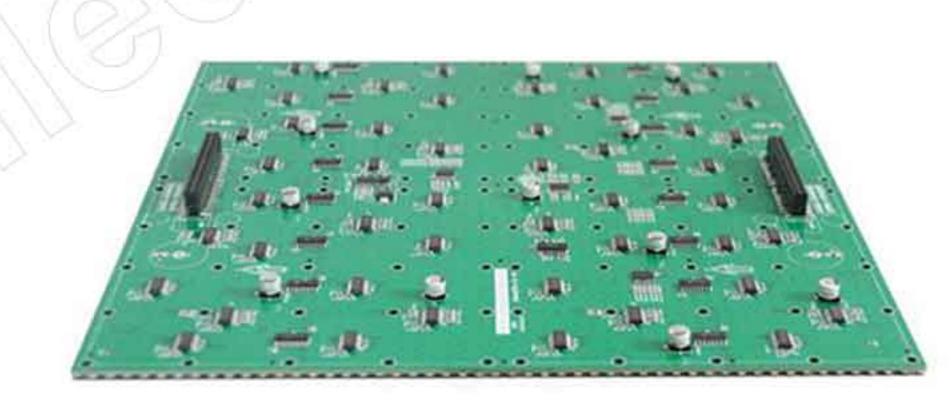


- n Optimized PCB board design n 4 layers PCB
- n Calibration-memo in PCB board n Perfect matched with Novastar control system
- n Perfect heat sinking n CE / EMC certified optional

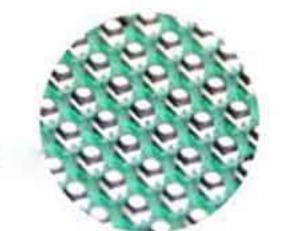

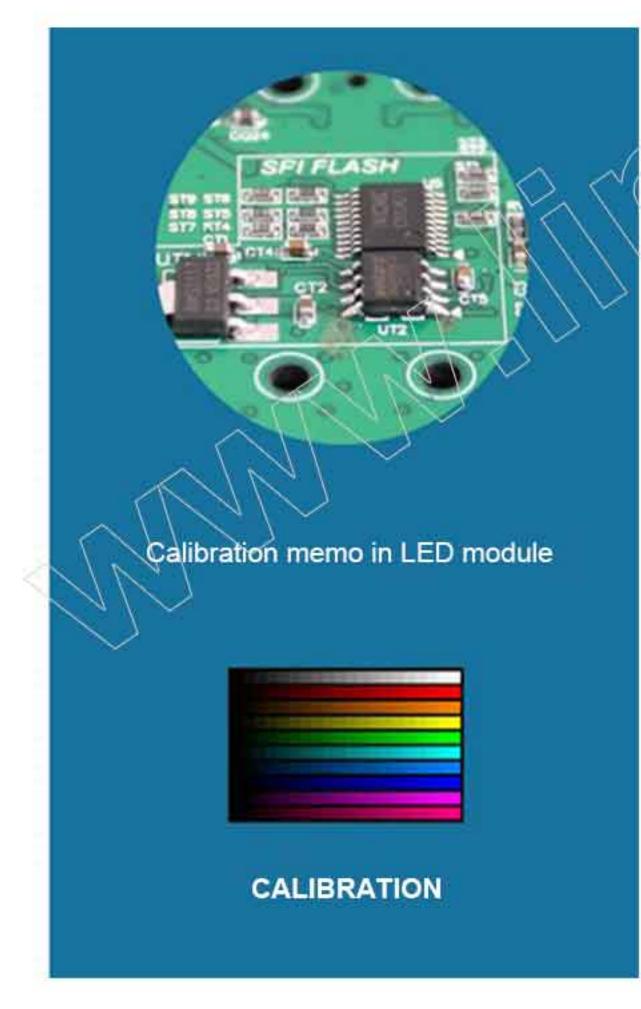



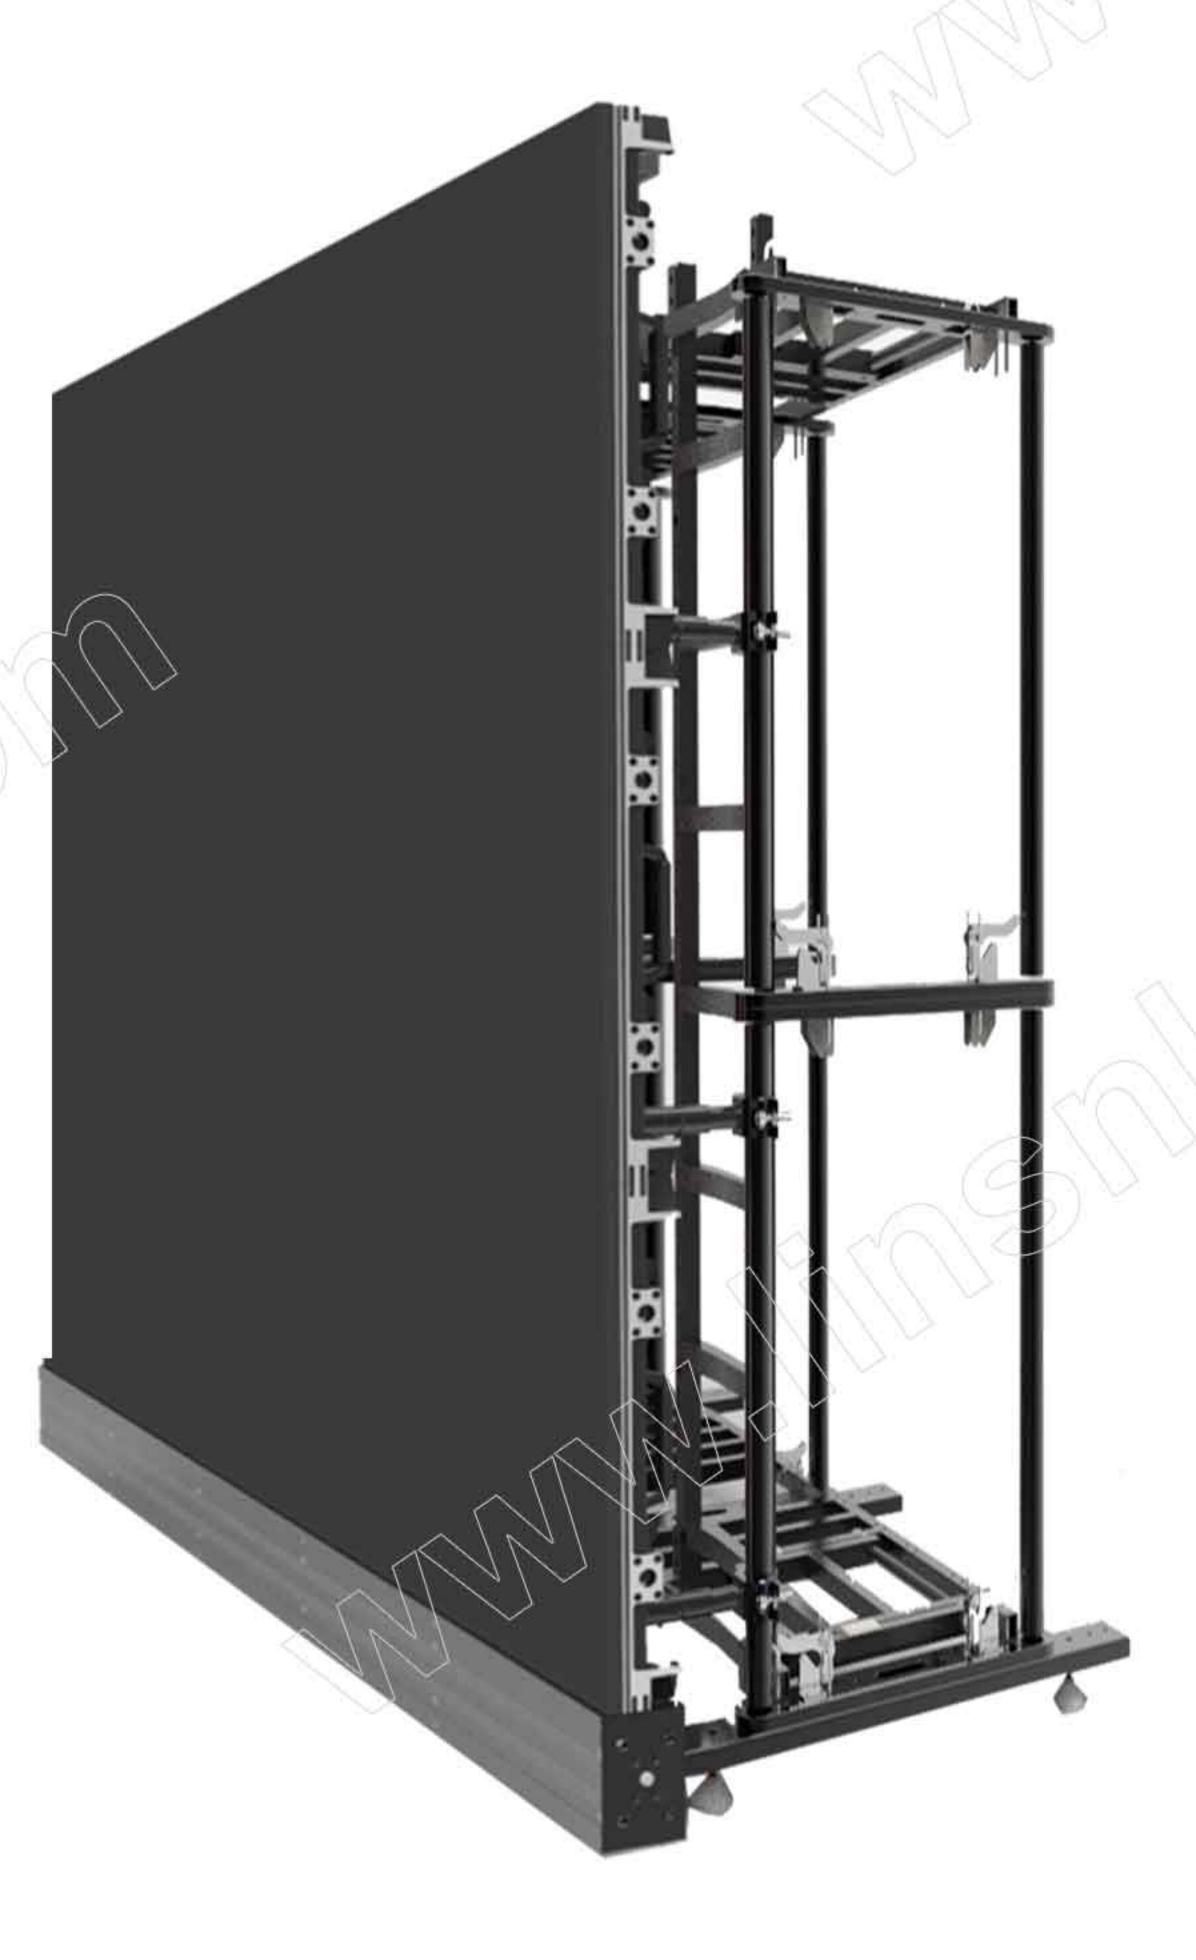

Specification

			Indoor					
Pixel Pitch	2mm	2.5mm	3.07mm	4mm	5mm			
Pixel Configuration	SMD1515	SMD2121	SMD2121	SMD2121	SMD2121			
Density (dots/m²)	250000	160000	105688	62500	40000			
Scan	1/40	1/32	1/26	1/20	1/16			
Module Size			320x160mm					
Module Resolution (dots)	160x80	128x64	104x52	80x40	64x32			
Cabinet Size			640x480x56mm					
Cabinet Resolution (dots)	320x240	256x192	208x156	160x120	128x96			
Cabinet Weight			5.5kg/pc					
Material		Die	-casting Magnesium A	Alloy				
Brightness			800-1200cd/m ²					
View Angle		140 degree	(horizontal) 140 deg	ree(vertical)				
Operation Power		AC100	0-240V 50-60HZ Swite	ch-able				
AVG Power Con	400w/m²	450w/m²	380w/m²	350w/m²	320w/m²			
MAX Power Con	980w/m²	950w/m²	900w/m²	880w/m²	850w/m²			
Best Viewing Distance	2m to 20m	2.5m to 25m	3m to 30m	4m to 40m	5m to 50m			
Service Access			Full Front					
Grey Level		12bits	input, correction with	14bits				
Frame Frequency			≥60HZ					
Screen Refresh rate			≥1920HZ					
Control Distance		Etherne	t cable 100m, optical f	iber 5km				
Humidity-operating	10-95% RH							
Operating Life	100000 hours							
MTBF	5000 hours							
Continuous Working Time	≥48 hours							
Controlling mode		Synch or Async						
Protective grade			IP43					



SHENZHEN LINSN LED CO.,LTD.

Tel:+86-755-32925789 Mobile/ Skype/Whatsapp /Wechat:+13787050055 Website: www.linsnled.com LED Online Shop: www.ledinthebox.com

Address: Building 11, Sanlian Industrial Park, Shiyan Town, Bao'an District, Shenzhen, China.



Website: www.linsnled.com Tel:+86-755-32925789








LINSN-MA-640x480


MA-640X480-P2/2.5/3.07/4/5

Indoor front maintenance wall-mounted LED display

Indoor installation, no need to reserve the maintenance channel; module, power supply, receiving card, all can be replaced in front! Save space and reduce frame costs.

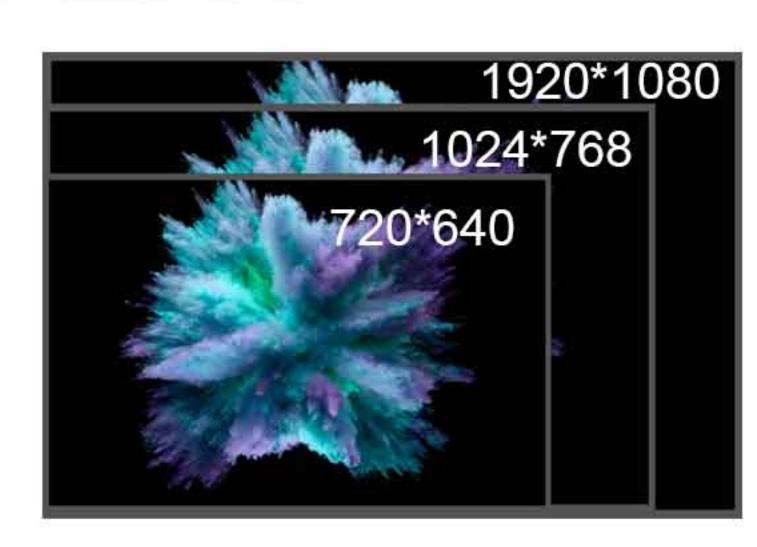

Custom output resolution by yourself

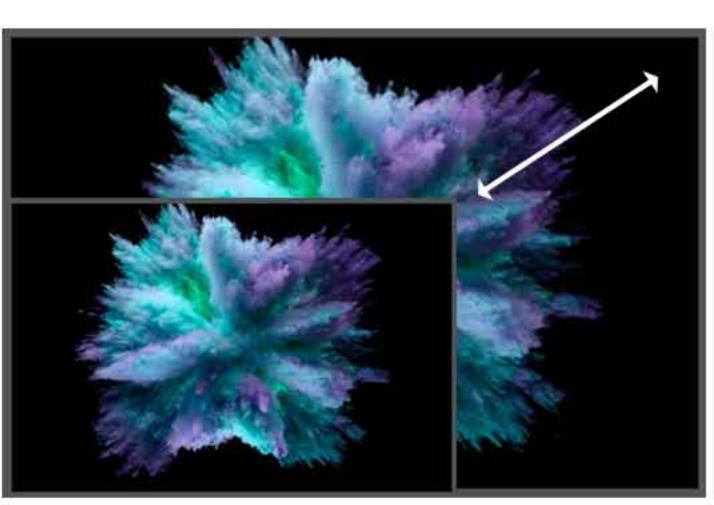

Adapt to the scaling picture point to point automatically



Infinite split screen





3 seconds front maintenance, maintenance be dumbed down. Save time, labor&money. Magnetic front service, 1 second disassemble a module.



Magnetic installation,
Module can be
replaced in front.

Power supply can be replaced in front.


Receving cardcan be replaced in front.

Focus on details

- The cabinet is made of magnesium alloy, which is light in weight, thin in thickness
- o and elegant in appearance. Wall mounting installation, complete front maintenance
- of for module, power supply and cards.erfect flatness, easy to install and disassemble
- The cabinet adopts internal wiring and the wiring is simple, which perfectly realizes
- the splicing of the cabinet. The cabinet has good heat dissipation, no noise, energy,
- saving and environmental protection. Perfect design of lamp board PCB,
- high-end selection of IC, easy to achieve high gray, high refresh, high brightness
- Widely used in commercial display, indoor fixed advertising, auditorium, conference room, banquet, vestibule, exhibition demonstration, transportation, studio, command and control;

640x480mm cabinet size, it can be assembled with a variety of 4:3 and 16:9 LED large screens, directly mounted on the wall, saving space and labor.

The same proportion of video source as LCD, directly replacing the original LCD. Widely used in auditorium, conference room, banquet hall, security monitoring, command system.

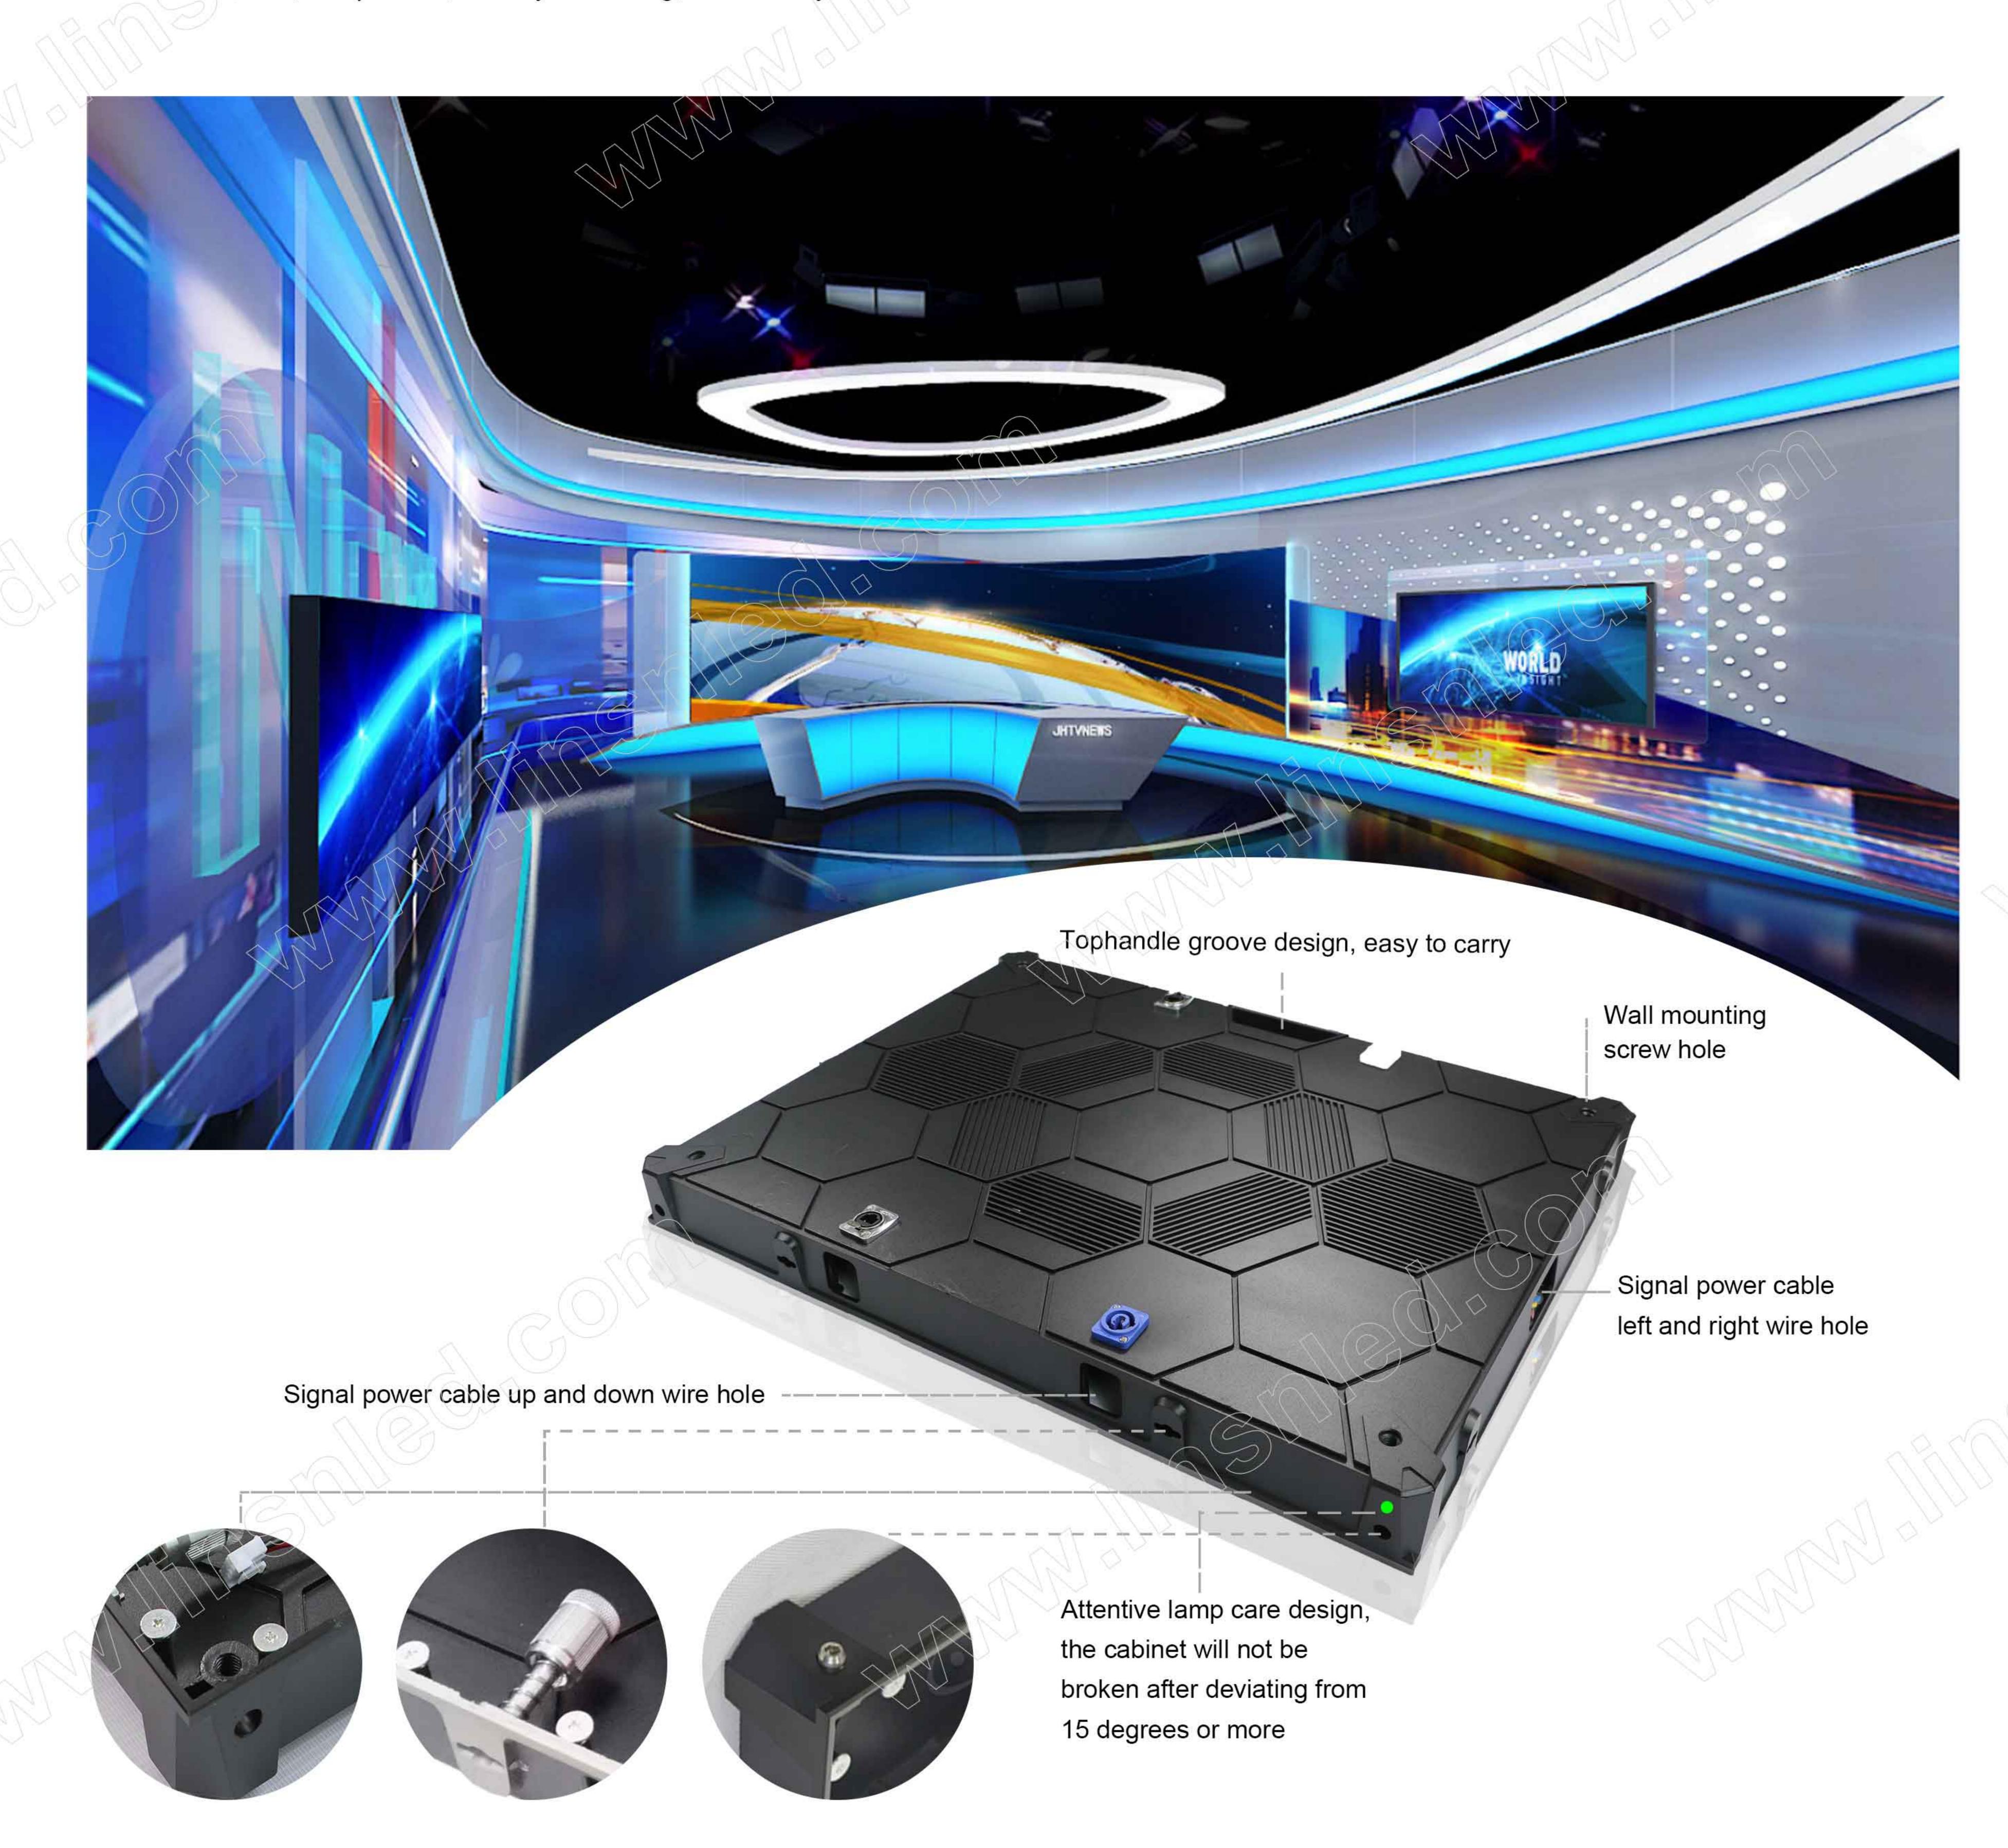

Specification

			2 7 25 7/13				
400X300	Indoor						
Pixel Pitch	1.25mm	1.56mm	1.667mm	1.923mm			
Scan	1/30	1/32	1/30	1/26			
Input Voltage (AC)	110 / 240V	110 / 240V	110 / 240V	110 / 240V			
Module Resolution (dots)	160x120	128x96	120x90	104x78			
Module Dimension (mm)	200x150	200x150	200x150	200x150			
Cabinet Resolution(dots)	320x240	256x192	240x180	208x156			
Pixel Density	640000	409600	360000	270400			
Refresh Rate (HZ)	3840	3840	3840	3840			
Cabinet Dimension		400x300	0x77mm				
Cabinet Weight	5.85kg						
Grey Level	16 bits						
Pixel Configuration	SMD1010						
Protective grade	IP54						

480X480	Indoor					
Pixel Pitch	1.667mm	1.875mm	2mm	2.5mm		
LED Type	SMD1010	SMD1515	SMD1515	SMD1515		
Module size (mm)	240*240	240*240	240*240	240*240		
Module resolution	144*144dots	128*128dots	120*120dots	96*96dots		
Density (pixels/sqm)	360000	285150	250000	160000		
LED Cabinet Size(mm)	480*480*55	480*480*55	480*480*55	480*480*55		
Cabinet Weight	6.5kg/pc	6.5kg/pc	6.5kg/pc	6.5kg/pc		
Brightness cd/m2 (Nits)	800-1000	800-1000	800-1000	800-1000		
Material		Die Casting	Aluminum			
Average power consumption		350v	v/m2			
Maximum power consumptic		750v	v/m2			
Grey Level	16 bits					
Fresh frequency	2400-3840HZ					
Protective grade		IP	54			



SHENZHEN LINSN LED CO.,LTD.

Tel:+86-755-32925789 Mobile/ Skype/Whatsapp /Wechat:+13787050055 Website: www.linsnled.com LED Online Shop: www.ledinthebox.com

Address: Building 11, Sanlian Industrial Park, Shiyan Town, Bao'an District, Shenzhen, China.



Website: www.linsnled.com Tel:+86-755-32925789





LINSN-400X300/480X480-HD

400X300-HD-P1.25/1.56/1.667/1.923 480X480-HD-P1.667 / 1.875 / 2 / 2.5


LINSN 400X300 / 480X480 SERIES HD LED VIDEO WALL

Perfect replacement for LCD display. Die cast aluminum cabinet, guarantee you a flat and seamless screen Good uniformity Dot-to-dot correction technology provide you pure image with great gradation.

LINSN-480mmX480mm HDLED Display

P2.5mm 480mmx480mm Double Service LED Display eith 240mmx240mm LED Module Size Easy Install and Back & Fron Dual Maintainance Service Die Casting Aluminum Material LED cabinet with magnets for frontal and backside Dual Maintainance Service.



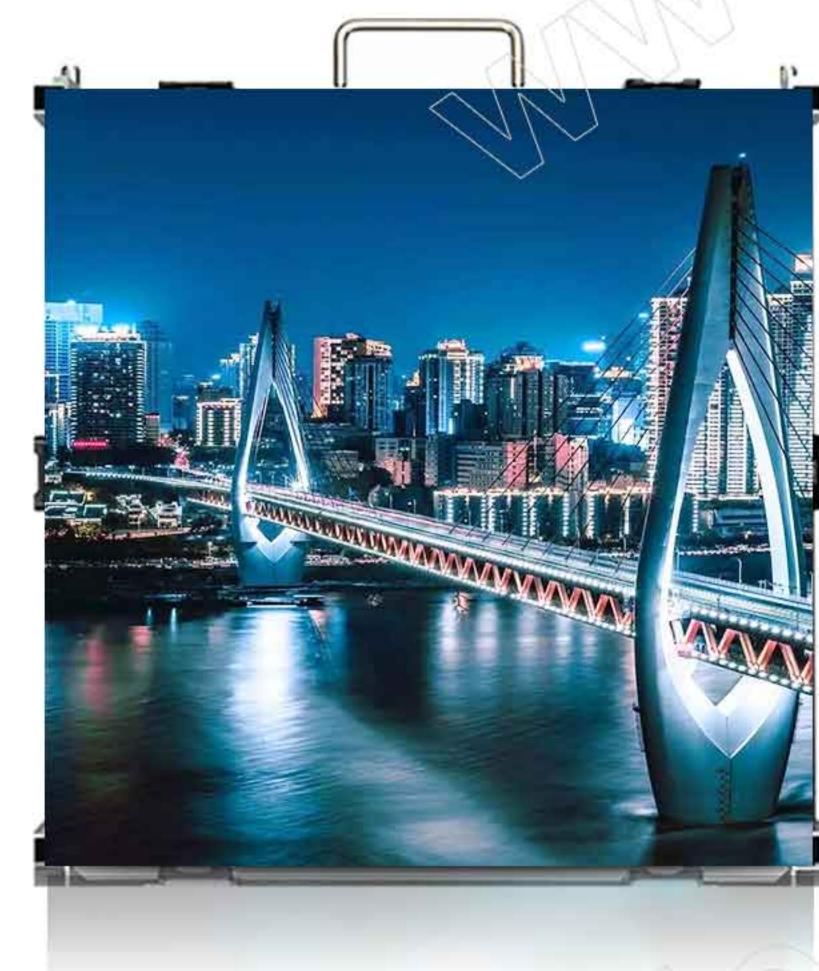

LED Cabinet With 240 mm x2 40 mm LED Module, Big Size Module to make the cabinets more flatness, Best Contrast to show the videos, LED Module with Mask to achieve the best Contrast. P1.875mm, P2mm, P2.5mm with Hub75 interface easy to control by LED Control System.









Wide Viewing Angle

Viewing angle is up to 160° vertical and horizontal, providing a wide viewing angle.

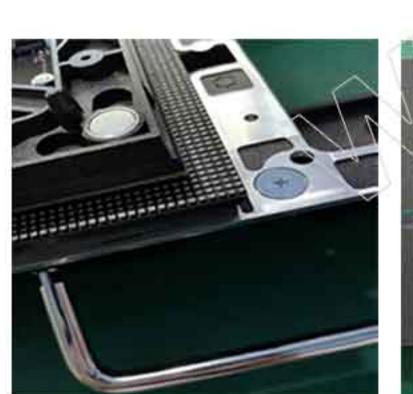

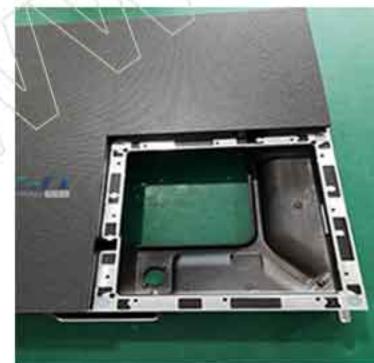
















Low refresh rate



LINSN-400mmx300mm HDUED Display

4:3 HD LED Display


It delivers a truly amazing picture in every details with extrodinary pixels producing an image that is High difinition quality in an HD LED display. 16bits gray processing technology, with 65536 grayscale, excessive nature, according to the video picture of extremely fine texture, looked more comfortable.

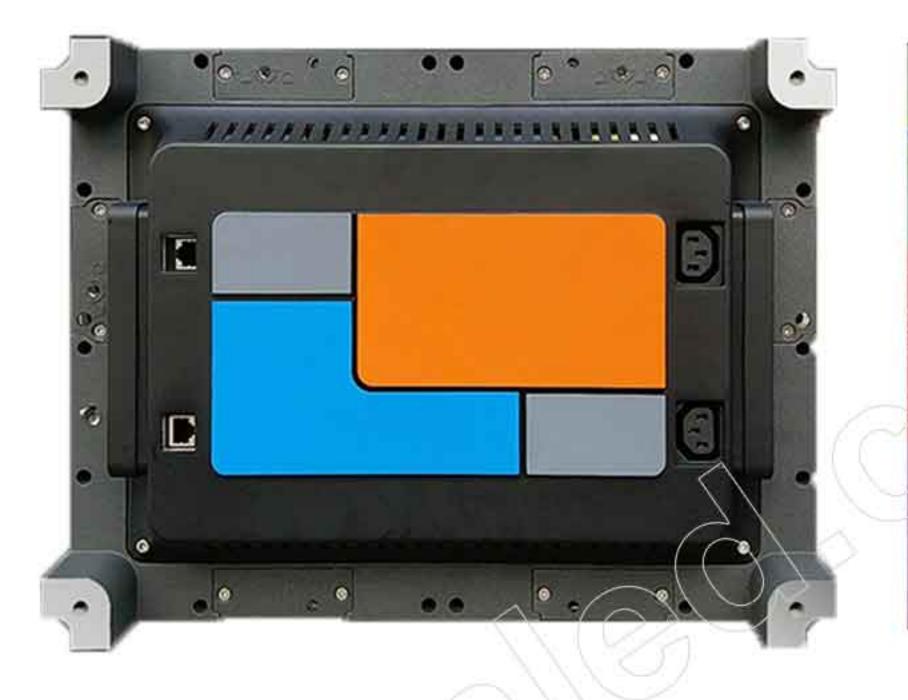




Ultra HD Perfect Picture Quality

High resolution brings delicate display effect, and it is a perfect embodiment of the new generation of ultra-high-definition LED display technology. Pixel pitch is 1.25mm, 1.56mm, 1.667mm, 1.923mm.

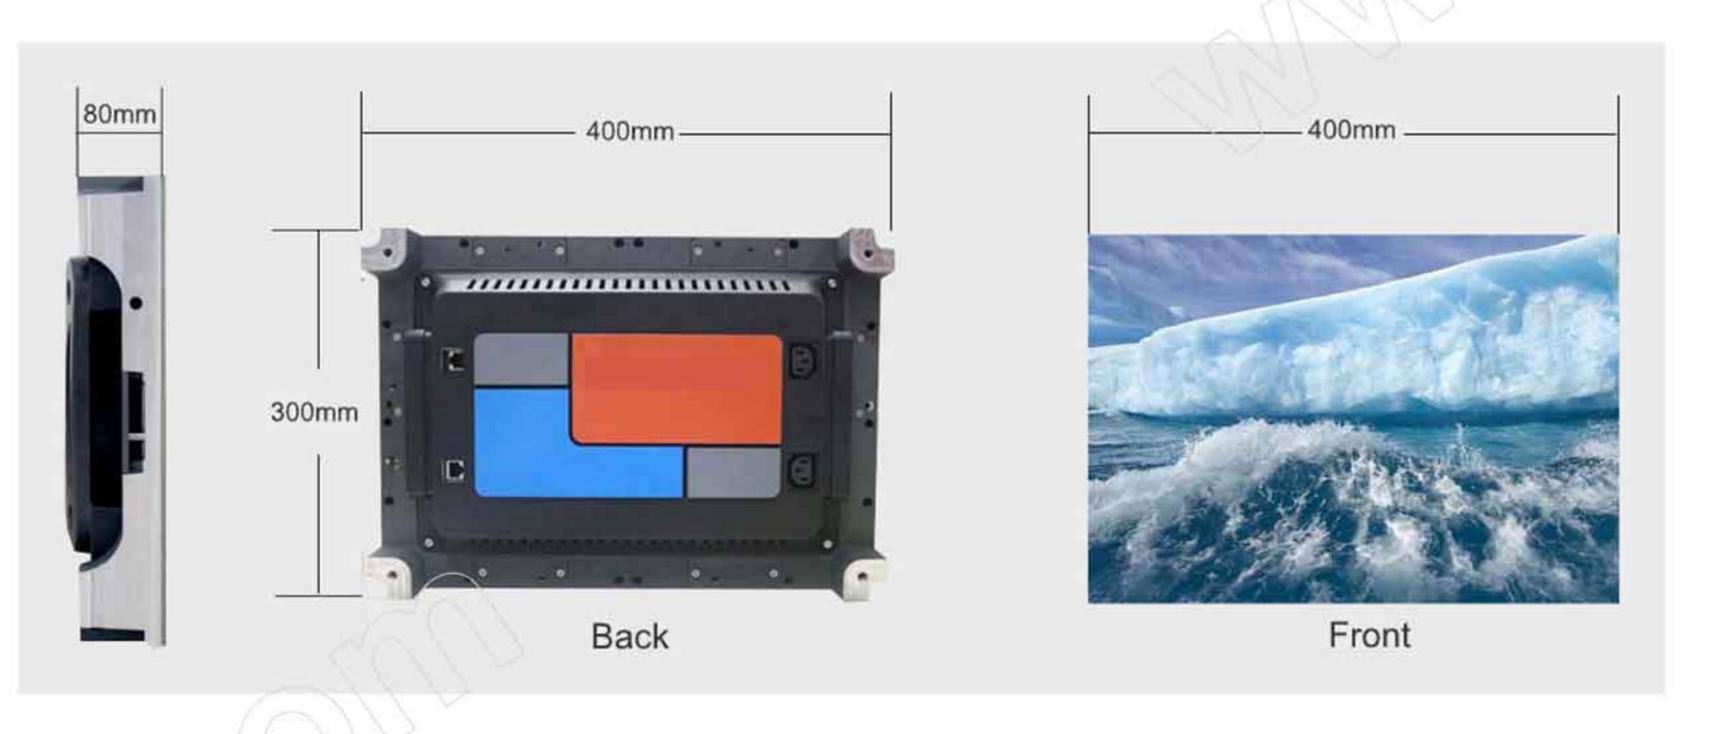

Seamless splicing, Assemble screen freely

Patented connecting piece, and hang pin rotating at 120 degree to lock the case, and gap adjustable to ensure the seamless screen, and rapid installation and removal supported. Only 1/4 of installation time compares with traditional structure.

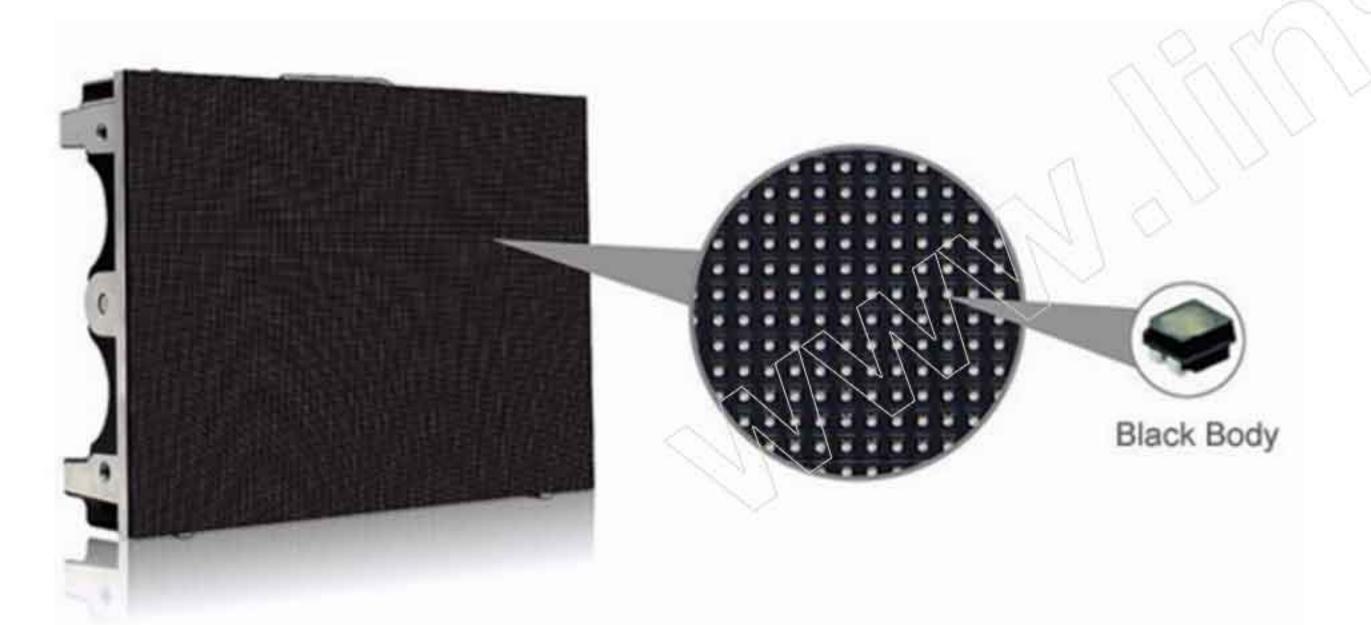

Specification

	Indoor						
Pixel Pitch	1.25mm	1.56mm	1.875mm	2.5mm			
Pixel configuration	SMD0808/1010	SMD0808/1010	SMD0808/1010	SMD0808/1010			
Pixel Density (dots/m2)	640000	409600	286225	160000			
Module resolution (W×H)	160×135	128×108	160×90	80×135			
Module size (W×H)	200×168.75	200×168.75	200×168.75	200×168.75			
Module weight (kg)	0.4	0.4	0.4	0.4			
Module of cabinet (W×H)	3×2	3×2	3×2	3×2			
Cabinet resolution (W×H)	480×270	384×216	320×180	240×135			
Drive mode	1/27	1/27	1/30	1/27			
Cabinet size (mm)		600 (W) ×337.5	(H) ×80 (D)				
Cabinet area (m2)		0.20	025				
Cabinet weight (kg)		7.	8				
Maintenance mode		Fro	ont				
Cabinet raw material		Die-casting	aluminum				
White Balance Brightness (nit:	660	≥800 (6	500K)				
Viewing Angle (H/V)		160	/160				
Contrast		5000	D: 1				
Peak power consumption	800						
Average power consumption	250						
Grayscale level	65536						
Refresh rate (Hz)	≥3840						
Protective grade		IP.	43				



SHENZHEN LINSN LED CO.,LTD.

Tel:+86-755-32925789 Mobile/ Skype/Whatsapp /Wechat:+13787050055 Website: www.linsnled.com LED Online Shop: www.ledinthebox.com

Address: Building 11, Sanlian Industrial Park, Shiyan Town, Bao'an District, Shenzhen, China.



Website: www.linsnled.com Tel:+86-755-32925789





LINSN-N169-HD

N169-HD-P1.25/1.56/1.875/2.5

LINSN N169 SERIES HD LED VIDEO WALL /16:9 CABINET DESIGN

Linsn 16:9 LED display with Cabinet's 16:9 resolution, is specialized for command center Perfect replacement for LCD display. Die cast aluminum cabinet, guarantee you a flat and seamless screen Good uniformity Dot-to-dot correction technology provide you pure image with great gradation.







- NEW DESIGN

Linsn-N169-HD-Series

Invisible handle design,make cabinet more lightweight and thin, can stick the wall to install to save your installation space, the stripedesign on the back is more conducive to heat dissipation, Linsn professional design team with scientific and humanized unique latest design to bring you special use experience.




Two designs are available without handle, design for wall structure within handle design for rear structure

Diffrent design meets your different needs





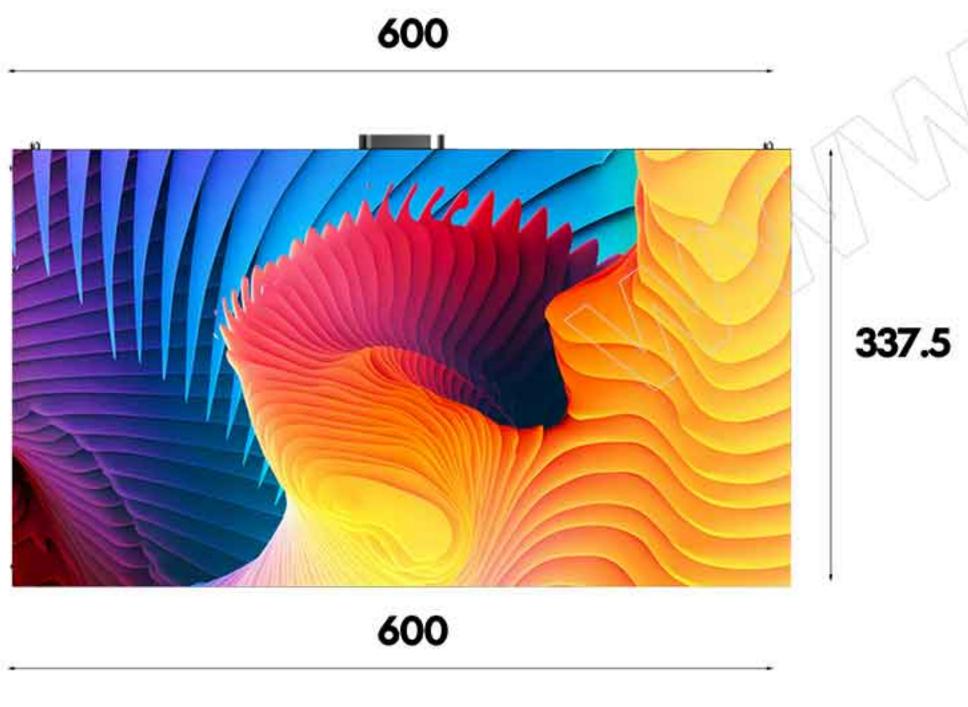





-FRONTAL SERVICE

The front servicealbe Ultra HD LED screen cabinet has fully described the strength of its light weight, met the needs of small space or where the needs of the cabinet thickness is needed, enhanced the vision of the space as well as its visionary effect. It allows for easy maintenance, saving time and labor on site.

-16:9 CABINET DESIGN

Linsn 16:9 LED display with Cabinet's 16:9 resolution, is specialized for command center. Perfect replacement for LCD display. Die cast aluminum cabinet, guarantee you a flat and seamless screen. Good uniformity. Dotto-dot correction technology provide you pure image with great gradation. 16:9 LED display Cabinets are aligned without any gap, assuring complete and uninterrupted visual experience.





High Definition, Bringing perfect visual experience

With a cabinet ratio 16: 9, the LED display is bespoke in size, flexible in installation and compatible with all the prevailing video formats, making it easier to create FHD, 2K, 4K and 8K video wall.



Dual Backup Interface, Challenging all Possibilities

Supporting dual control system, dual power supply backup, automatically switch the picture in an LED screen when it occures any problems to make sure a stable and reliable image.



Super Wide Viewing Angle

Viewing angle is up to 160° vertical and horizontal, providing a wide viewing angle.



High contrast ratio and refresh rate, fast response

The response speed exceeds the response limit of the naked eyes , while playing the high speed dynamic images in an LED screen it will have more advantages, there will be no ghosting and twisting and it will perfectly provide the dynamic images.

Worked every detail just for amazing experience

Exclusively designed signal status LCD display for better monitoring of your product.

Alignment Hole and Locating Pin Design, Precisely Seamless Splicing, the Splicing Gap<0.01mm.

Anti-skid Handle Design, Easy for transportation, loading and uploading.

high Strength Aluminum Alloy material, the integral die-casting aluminum molding workmanship has provided with excellent flatness of the cabinet.







